



GUERRILLARF
MAKING BETTER NETWORKS™



guerrilla-rf.com


WE ARE PERFORMANCE

The best wireless networks always start with the ultimate in RF component performance.

This fundamental belief drives everything we do at GRF – from innovative IC definition & design to unparalleled applications & production support.

Our passion for creating the very best RFICs has led directly to our success as one of the fastest growing semiconductor firms in the industry, and one of the top 500 companies as recognized by Inc. magazine.

With an installed base of close to 150M units, Guerrilla RF ICs deliver proven, ultra-reliable performance for an ever-growing variety of mission-critical applications.



WHO WE SERVE

PROVIDING THE CRITICAL BUILDING BLOCKS FOR PERFORMANCE-DRIVEN MARKETS

Our cores form the backbone of today's state-of-the-art RF and microwave communication systems.

Each RFIC is tailored to meet the demanding requirements of wireless infrastructure-grade applications found in 5G, Automotive Connectivity, SatCom, Cellular Boosters & DAS, Military Radios, Industrial Navigation, and Wireless Audio.



TABLE OF CONTENTS

PRODUCTS

Amplifiers

LNA Portfolio

LNA Overview / Performance Classifications	5
Ultra LNAs	6
Ultra LNAs with Bypass	6
Broadband LNAs	7
Broadband LNAs with Bypass	9
Low Current LNAs	10
Low Current LNAs with Bypass	10
Power LNAs	11

Medium and High-Power Amplifier Portfolio

Gain Block, Driver, & PA Overview	12
High Linearity Gain Blocks	13
High Linearity Gain Blocks with Bypass	14
High Frequency Gain Blocks	15
Linear Drivers	16
Linear Drivers with Bypass	16
Linear PAs	17
Guerrilla Bloc™ Linear PA Modules	18
Saturated PAs	18

RF Switches	19
-------------------	----

Digital Step Attenuators	19
--------------------------------	----

RF Power Detectors	19
--------------------------	----

Mixers	19
--------------	----

MARKET APPLICATIONS

Automotive Solutions	20
AEC-Q100 Automotive Qualified Devices	21
Automotive Solutions Overview	22
GPS/GNSS Front End Solutions	23
SDARS Front End Solutions	24
Cellular Compensator Solutions	26
V2X Compensator Solutions	28


Wireless Infrastructure Solutions	31
5G Millimeter Wave Solutions	32
5G TDD mMIMO Solutions	34
5G FDD mMIMO Solutions	36

4T4R/8T8R RRU Solutions	39
4T4R/8T8R TDD RRU Solutions	40
4T4R/8T8R FDD RRU Solutions	42

Small Cell Solutions	45
Small Cells (with DPD)	46
Picocells/Femtocells	48

Cellular Repeater/Booster/DAS Solutions	51
---	----

GRF REGIONAL SALES REPRESENTATIVES	54
--	----

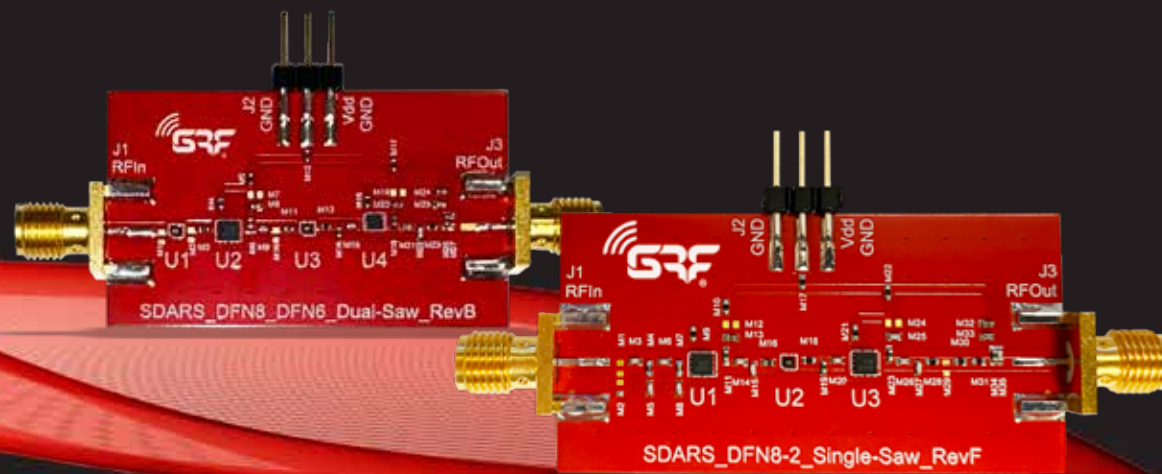

Corporate Address:
1196 Pleasant Ridge Road
Greensboro, NC 27409

www.guerrilla-rf.com


Phone: (336) 510-7840

Emails:
sales@guerrilla-rf.com
applications@guerrilla-rf.com
careers@guerrilla-rf.com
environmental@guerrilla-rf.com





2022 PRODUCTS


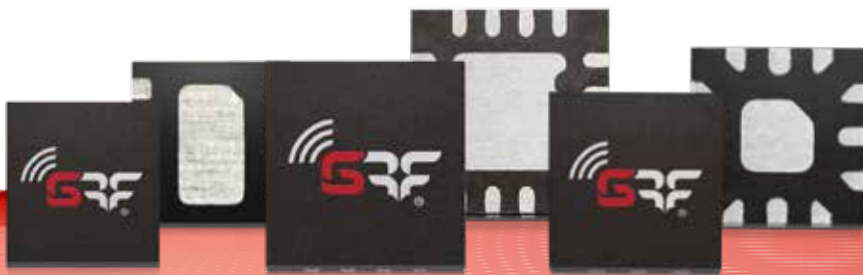


www.guerrilla-rf.com
Making Better Networks™


GRF LNAs

Guerrilla RF has one of the most extensive offerings of high performance LNAs in the industry. Each of the 60+ components in our library have been optimized to accentuate critical parameters like ultra low noise figure, frequency coverage, current consumption and linearity/compression performance.

Use the categories below as a guide to discovering the ideal component for your specific application.

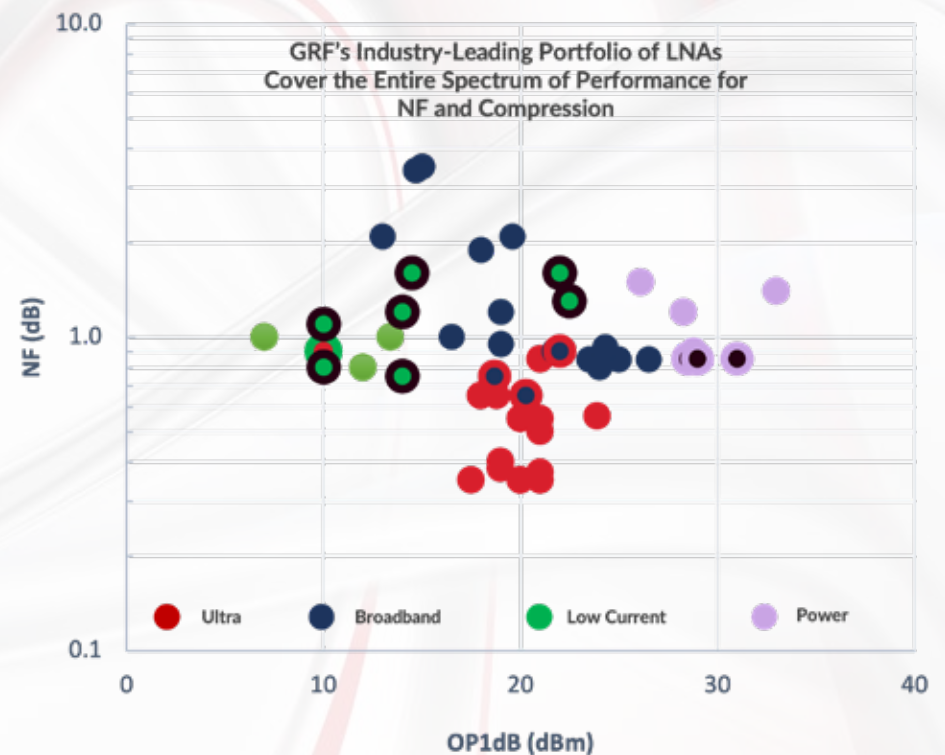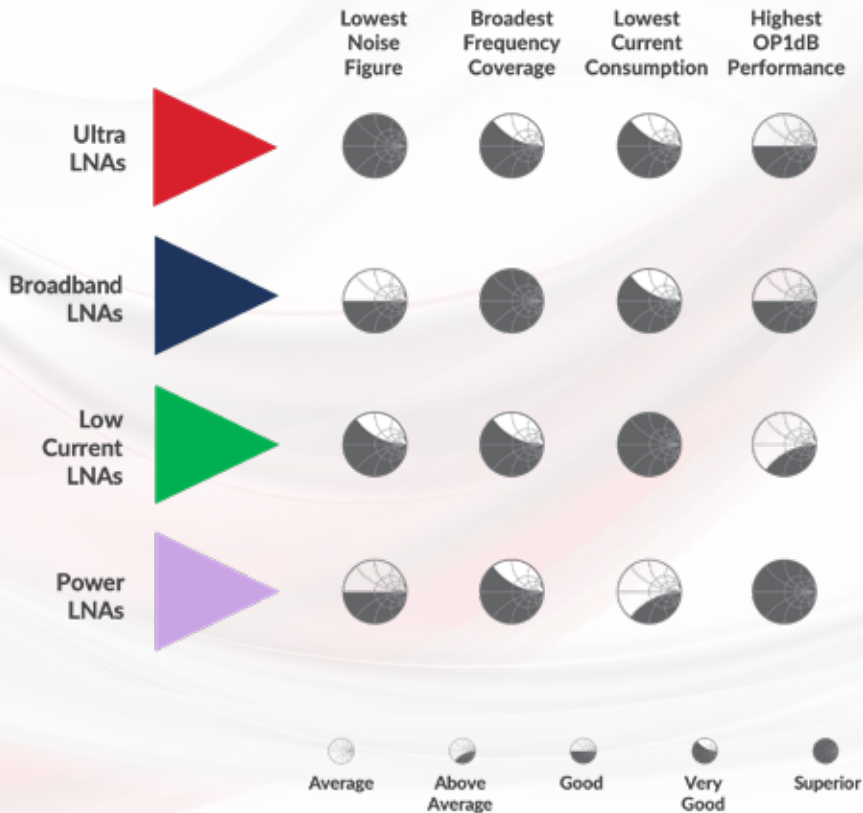

Ultra LNAs

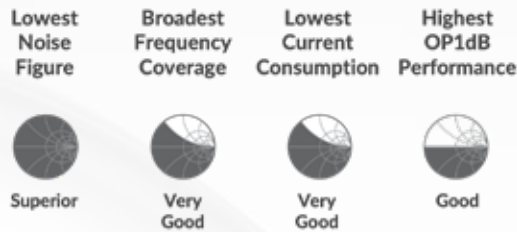

Ultra LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100		2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2133	0.4-2.7	28.5	0.65	20.3	30	1.8-5.0	30-160	High Gain	1.5 DFN-6
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100		2.0 DFN-8
GRF2071W	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	AEC-Q100 Automotive Qualified	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2078*	0.7-2.7	18.8	0.56	23.9	40.7	5	150	Dual Channel	3.0 QFN-16
GRF2051	0.7-3.8	19	0.37	21	36	2.7-5.0	20-100		2.0 QFN-12
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100		2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2052	1.7-4.5	19.2	0.5	21	38	2.7-5.0	20-100		2.0 QFN-12
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	Flat Gain, Broadband	1.5 DFN-6
GRF2171	2.5-5.0	29.5	0.75	18.7	41.5	5	75	High Gain	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100		2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100		1.5 DFN-6
GRF2093W	1.0-6.0	21	0.37	19	36	2.7-5.0	30-100	AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100		2.0 DFN-8
GRF2073W	3.0-6.0	20.5	0.4	19.8	35	2.7-5.0	20-100	AEC-Q100 Automotive Qualified	2.0 DFN-8
GRF2101	4.0-10.0	18	0.9	10	22	2.7-5.0	12-28	Low Cost	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.


Ultra LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2077*	0.7-3.8	17	0.9	22	40	3.0-5.0	70	Failsafe Bypass Mode	2.0 DFN-8
GRF2076	0.6-6.0	17.2	1.1	21	41	2.7-5.0	20-100		1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



Broadband LNAs

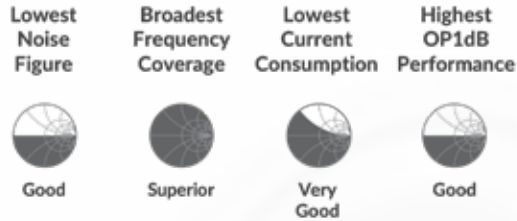

Broadband LNAs

Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2114	0.1-2.7	20-50	100-400	450-520 700-960	17.9	0.93	24.3	40.2	1.8-5.0	30-150	High Linearity	2.0 DFN-8
GRF2133	0.4-2.7	400-500 700-2700	800-2700 900-1200	1200-1600 1600-2100	28.5	0.65	20.3	30	1.8-5.0	30-160	High Gain	1.5 DFN-6
GRF2100	0.1-3.8	80-120 400-650 408-410 700-960	1150-1200 1150-1615 1540-1640 1700-2200	2300-2700 3400-3800 4300-5300	16.5	0.8	10	19	1.8-5.0	6-30		1.5 DFN-6
GRF2108*	0.1-3.8	100-700 241-251	470-960	400-2700	17	0.9	17.5	19	1.8-5.0	4-20	High Gain, Low Noise, Low Cost	1.5 DFN-6
GRF5020	0.1-3.8	30-2500 80-1000 350-750 470-870 500-3000 700-2700 800-1000	900-1300 1000-3300 1200-2000 1300-2700 1700-2700 1800-3800 2000-4000	2300-3500 2600-3400 3000-5000 3600-4400 4300-5300 5000-6000	17.3	0.8	24.5	37.2	4.5-10.0	50-200	High Linearity	3.0 QFN-16
GRF4002	0.1-3.8	15-50 20-40 70-110	100-1000 434-868 700-3600	1100-1700 1200-1400 2320-2345	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity, Ultra-Broadband	1.5 DFN-6
GRF4002W	0.1-3.8		700-3600		15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity, Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF4003	0.1-3.8	10-500 30-450	700-3600	868-915	13	0.85	25	41	1.8-5.0	30-120	High Linearity, Ultra-Broadband	1.5 DFN-6
GRF4004	0.1-3.8	20-60 400-900	600-1000	1700-2700	12.7	0.85	26.5	43	1.8-5.0	30-150	High Linearity	1.5 DFN-6
GRF5040	0.1-3.8	25-35 30-2500	900-1300 1200-1400	1500-1600 1700-2700	15	0.85	29.8	46.3	4.5-10.0	100-250	High Linearity	3.0 QFN-16
GRF2373	0.1-3.8	90-110 240-260 500-3000	800-1000 1700-2200	1900-2700 3600-4000	18.5	1.2	12.5	25	2.7-5.0	10-25		1.5 DFN-6
GRF2130*	0.7-3.8		1700-2200		32	1.2	14	17	1.8-5.0	15-50		1.5 DFN-6
GRF4012	0.4-4.2		2320-2345		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise	1.5 DFN-6
GRF4012W	0.4-4.2		2320-2345		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the "Custom Tunes" tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.



Broadband LNAs

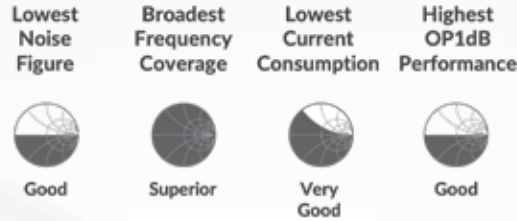

Broadband LNAs (continued)

Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2105	0.4-5.0	150-3500 450-1250 700-2700	800-3000 1000-2000 3000-5000	3300-4200 3400-3800 4400-5000	20.7	0.77	22.5	36	2.7-5.0	20-90	High Linearity; Ultra-Broadband	1.5 DFN-6
GRF2171	2.5-5.0	1170-1300 1525-1610 2000-2500	2100-2500 2900-3000 3400-3800	3300-4200 3800-4250	29.5	0.75	18.7	41.5	5	75		1.5 DFN-6
GRF5010	0.05-6.0	10-200 70-150 100-400	700-960 700-2700 900-1300	1700-3800 3400-3800 4250-4350	17	0.82	24.5	38.5	4.5-9.0	50-150	High Linearity; Ultra-Broadband	3.0 QFN-16
GRF4014	0.1-6.0	10-50 100-115 140-650 150-400	400-1000 902-928 950-1250 1240-1525	1700-3800 2400-2800 2700-3600 5800-6000	16.5	0.8	24	39	3.0-8.0	30-130	High Linearity; Ultra-Broadband	1.5 DFN-6
GRF4014W	0.1-6.0		1700-3800		17	0.8	24	39	3.0-8.0	30-130	High Linearity; Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF4001	0.1-6.0		0.1-6000		15.5	1	16.5	30.5	1.8-5.0	5-50	Ultra-Broadband	1.5 DFN-6
GRF2505	4.0-6.0		4000-5925		12.5	1.2	19	30	1.8-5.0	20-60	Ultra-Broadband	1.5 DFN-6
GRF2013	0.05-8.0	50-100 50-2200 70-6000 100-500 100-1000 400-1000	700-900 700-3900 800-860 1200-1500 1700-2000 2000-6000	2500-2700 3000-6000 3400-3800 5855-5925 6000-7000 7750-8250	18.5	1.3	22.5	38.5	2.7-8.0	15-100	High Linearity; Ultra-Broadband	1.5 DFN-6
GRF2013W	0.05-8.0		700-3900		18.5	1.3	22.5	38.5	2.7-8.0	15-100	High Linearity; Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF3014*	0.001-9.0		0.1-9000		10	6	12.4	26	5	35-45	Ultra-Broadband	1.5 DFN-6
GRF3016	0.001-10.0		0.1-10000		13.5	4.2	16.5	30	5.0-9.0	65-80	Ultra-Broadband	1.5 DFN-6
GRF2004	0.1-10.0	0.1-10000 ² 50-300 50-10000	950-1700 2000-6000	7000-8000 9000-10000	16.5	1.9	18	31	1.8-5.0	60-120	Ultra-Broadband	1.5 DFN-6
GRF2003	0.1-10.0	400-6000	1000-5000	1000-10000	12	3.5	15	29	2.7-5.0	40-80	Ultra-Broadband	1.5 DFN-6
GRF3044	0.01-11.0	0.1-11000 ²	5000-6000	9000-11000	16.9	2.1	19.6	31.5	> 5.0	60-120	Ultra-Broadband	1.5 DFN-6
GRF3012	0.001-12.0		0.1-12000 ²		11	5.0	5	18	4.5-9.0	17-22	Ultra-Broadband	1.5 DFN-6
GRF2710	8.0-13.0		8000-12000		13.9	2.1	13	21	3.0-8.0	20-40	Ultra-Broadband	1.5 DFN-6
GRF3042	0.01-15.0		0.1-15000 ²		14.5	3.4	14.7	26	> 5.0	35-60	Ultra-Broadband	1.5 DFN-6
GRF3010*	0.001-15.0		0.1-15000 ²		14.3	5	5	17.5	5	17-22	Ultra-Broadband	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.



Broadband LNAs

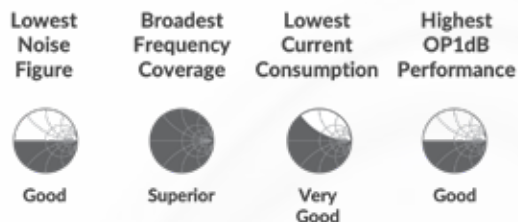

Broadband LNAs with Bypass


Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF4042	0.4-2.7	415-460 700-960	700-2700 1710-2170	1600-2100 2500-2700	16	0.9	22	36	1.8-5.0	20-180	High Linearity; Ultra-Broadband	2.0 QFN-12
GRF2140	0.1-3.8	85-115	493-547 1700-2200	2000-3000	16.2	1.1	10	23.5	2.7-5.0	6-30		1.5 DFN-6
GRF2374	0.1-3.8	380-480	400-960 1700-2200	820-920	16.5	1.2	10	22	2.7-5.0	10-25	Ultra-Broadband	1.5 DFN-6
GRF2077*	0.7-3.8		1700-2700		17	0.9	22	40	3.0-5.0	70	High Linearity	2.0 DFN-8
GRF2243	0.4-5.0	400-500 900-1000	1700-2100 2300-2700	3400-3800 4400-5000	19.7	0.75	14	23	2.7-5.0	8-25		1.5 DFN-6
GRF2243W*	0.4-5.0		2300-2700		19.7	0.75	14	23	2.7-5.0	8-25	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2043	0.05-6.0		400-2700		18.4	1.6	22	37	2.7-5.0	20-100	High Linearity	1.5 DFN-6
GRF4142	0.1-6.0	30-90 100-150 150-2700 415-460	700-2700 1700-2200 1920-2170 2400-2600	3600-3800 4400-4900 5000-6000	15.3	0.9	19.3	33	1.8-5.0	15-80	Ultra-Broadband	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the "Custom Tunes" tab on the product's web page to view the latest set of matching options.



Low Current LNAs

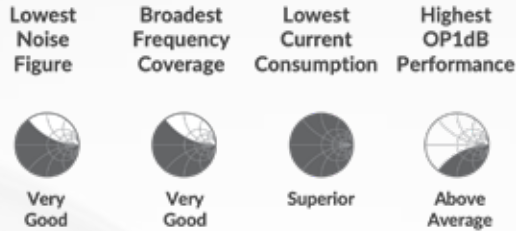

Low Current LNAs


Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	Low Cost	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	Low Cost	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	High Gain, Low Noise, Low Cost	1.5 DFN-6
GRF2201	0.4-3.8	20.5	0.8	12	26	2.7-5.0	10-30	High Gain	1.5 DFN-6
GRF2130*	0.7-3.8	32	1.2	14	17	1.8-5.0	15-50	Ultra-High Gain	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	High Gain	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	15-100	Flat Gain	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2501	4.9-6.0	16	1	7	19	2.7-5.0	12-28		1.5 DFN-6
GRF2501W	4.9-6.0	16	1	7	19	2.7-5.0	12-28	AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2101	4.0-10.0	18	0.9	10	22	2.7-5.0	12-28	Low Cost	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Low Current LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2140	0.1-3.8	16.2	1.1	10	23.5	2.7-5.0	6-30		1.5 DFN-6
GRF2374	0.1-3.8	16.5	1.2	10	22	2.7-5.0	10-25		1.5 DFN-6
GRF2243	0.4-5.0	19.7	0.75	14	23	2.7-5.0	8-25	High Gain	1.5 DFN-6
GRF2243W*	0.4-5.0	19.7	0.75	14	23	2.7-5.0	8-25	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2043	0.05-6.0	18.4	1.6	22	37	2.7-5.0	20-100	High Gain; High Linearity	1.5 DFN-6
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	Flat Gain; High Linearity	1.5 DFN-6
GRF2541	4.9-6.0	16.4	1	7	19	2.7-5.0	12-28		1.5 DFN-6
GRF2543	4.9-6.0	14.4	1	13.4	25.5	2.7-5.0	15		1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

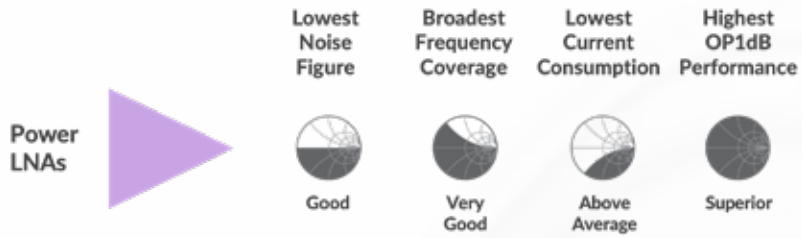

Power LNAs


Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF5109	0.4-1.5	17.9	1.2	28.3	45	2.7-5.0	50-200		3.0 QFN-16
GRF5115	0.1-2.7	14.8	1.4	33	45	2.7-5.0	100-300	Highest Linearity	3.0 QFN-16
GRF5110	1.5-2.7	15	0.9	28.8	45	2.7-5.0	50-200	Lowest Noise	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	Lowest Noise	3.0 QFN-16
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	Lowest Noise	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	Lowest Noise, Broad Frequency Range	3.0 QFN-16
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Gain, Broad Frequency Range	3.0 QFN-16




GRF Gain Blocks, Drivers, & PAs

Guerrilla RF has over 35 medium and high-power amplifier cores which have been optimized for linearity over a variety of RF and microwave frequency ranges.

Use the categories below as a guide to discovering the ideal component for your specific application.

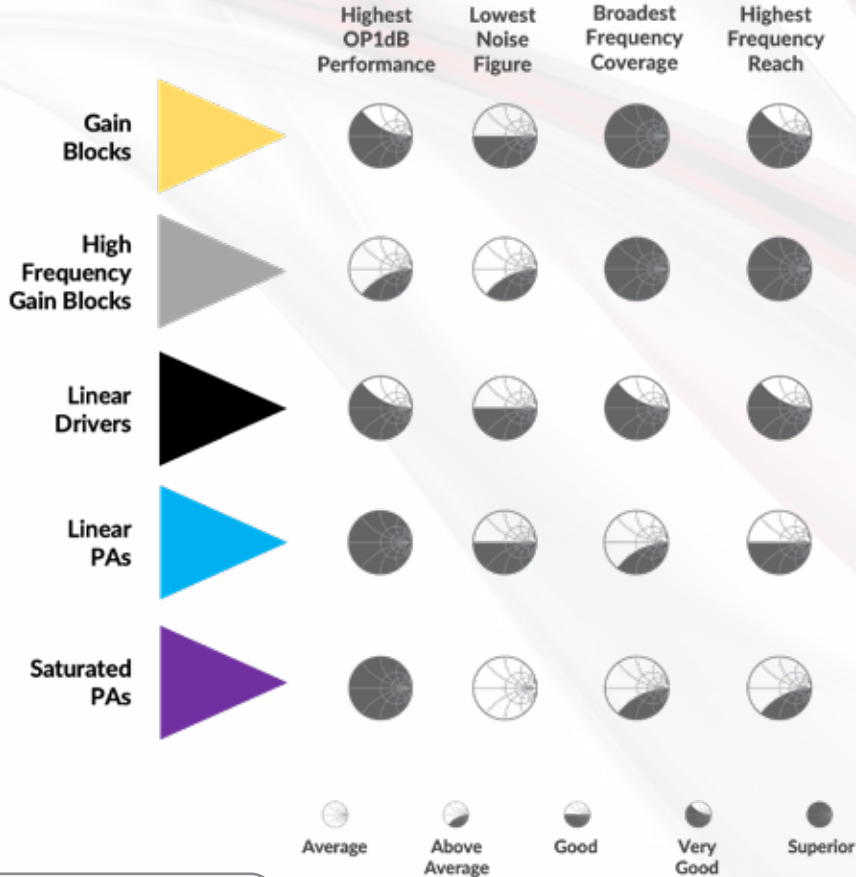

GRF's Industry-Leading Portfolio of LNAs Cover the Entire Spectrum of Performance for NF and Compression

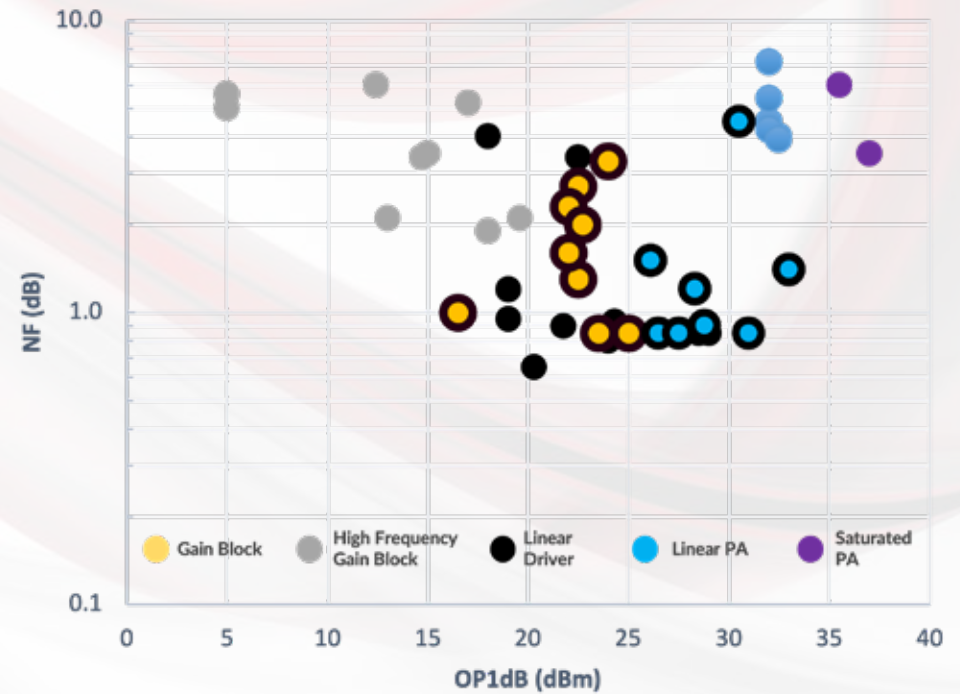



High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF2011	0.05-3.8	20-70 40-60	174-240 450-520	700-3800	15.2	2	22.7	40	2.7-8.0	15-100		1.5 DFN-6
GRF2014	0.05-3.8	100-1800	500-3000	1500-2400	15.9	3.3	24	43.5	2.7-8.0	50-180	Flat Gain	1.5 DFN-6
GRF4002	0.1-3.8	15-50 20-40 70-110	100-1000 100-3600 430-870 700-3600	1100-1700 1200-1400 2320-2345	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise	1.5 DFN-6
GRF4002W	0.1-3.8		700-3600		15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF4003	0.1-3.8	10-500 30-450	700-3800	868-915	13	0.85	25	41	1.8-5.0	30-120	Low Noise	1.5 DFN-6
GRF4012	0.4-4.2	30-100 200-3000	2320-2345	3200-4200	17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise	1.5 DFN-6
GRF4012W	0.4-4.2		2320-2345		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2010	0.05-5		400-4000		10.5	3.1	20.5	32.5	2.7-8.0	15-100	Broadband, Low Noise	1.5 DFN-6
GRF2012	0.05-6.0	50-6000 700-900	700-1200 400-3800	1700-2000 2500-2700	15	2.7	22.5	40	2.7-8.0	30-120	Flat Gain	1.5 DFN-6
GRF2012W	0.05-6.0		400-3800		14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF4001	0.1-6.0	100-5500	3300-3800		15.5	1	16.5	30.5	1.8-5.0	5-50	Low Noise	1.5 DFN-6
GRF2013	0.05-8.0	50-100 50-2200 70-6000 100-500 100-1000 400-1000	700-900 700-3800 800-860 800-860 1200-1500 1700-2000 2000-6000	2500-2700 3000-6000 3400-3800 5855-5925 6000-7000 7750-8250	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Low Noise, Flat Gain	1.5 DFN-6
GRF2013W	0.05-8.0		700-3800		18.5	1.3	22.5	38.5	2.7-8.0	15-100	Low Noise, Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.



Gain
Blocks




High Linearity Gain Blocks with Bypass

Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz)			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
		[Standard Datasheet Tune in BOLD]										
GRF2043	0.05-6.0	400-2700	700-5000		18.4	1.6	22	37	2.7-5.0	20-100	Low Noise	1.5 DFN-6
GRF2042	0.05-6.0	600-2700	3500-4500	5000-6000	15	2.3	22	39	2.7-5.0	20-100	Flat Gain	1.5 DFN-6

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

High Frequency Gain Blocks

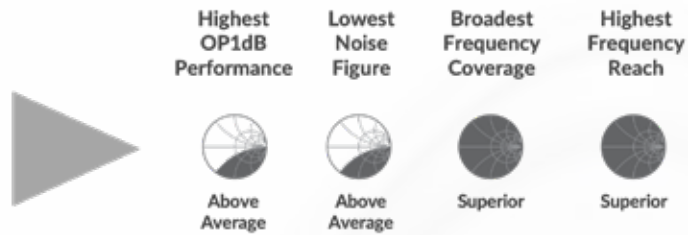

High Frequency Gain Blocks

Part Number	Frequency Range (GHz)	Reference Design Tunes ¹ (MHz) [Standard Datasheet Tune in BOLD]	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF3014*	0.001-9.0	1-9000 ²	10	6	12.4	26	5	35-45	Ultra-Flat Gain, Near-DC Frequency Operation	1.5 DFN-6
GRF3016	0.001-10.0	1-10000 ²	13.5	4.2	16.5	30	5.0-9.0	65-80	Flat Gain, Near-DC Frequency Operation	1.5 DFN-6
GRF2004	0.1-10.0	50-300 50-10000 100-10000 950-1700 2000-6000 7000-8000 9000-10000	16.5	1.9	18	31	1.8-5.0	60-120	Low Noise	1.5 DFN-6
GRF2003	0.1-10.0	400-6000 1000-5000 1000-10000	12	3.5	15	29	2.7-5.0	40-80		1.5 DFN-6
GRF3044	0.01-11.0	100-10000 100-12000 5000-6000 9000-11000	16.9	2.1	19.6	31.5	> 5.0	60-120	Low Noise	1.5 DFN-6
GRF3012	0.001-12.0	1-12000 ²	11	5.0	5	18	4.5-9.0	17-22	Flat Gain, Near DC Frequency Operation	1.5 DFN-6
GRF2710	8.0-12.0	8000-12000	13.9	2.1	13	21	3.0-8.0	20-40	Low Noise	1.5 DFN-6
GRF3010*	0.001-15.0	1-15000 ²	14.3	5	5	17.5	5	17-22	Low Current	1.5 DFN-6
GRF3042	0.01-15.0	100-15000	14.5	3.4	14.7	26	> 5.0	35-60		1.5 DFN-6


* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.



Linear Drivers

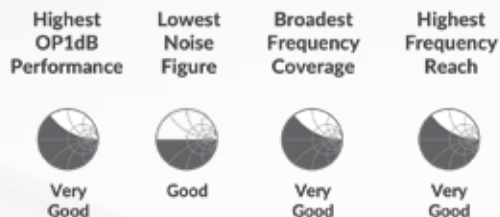

Linear Drivers


Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF5307*	0.617-0.862	35.6	3.6	32.9	39	5	150 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5109	0.4-1.5	17.9	1.2	28.3	45	2.7-5.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF5317*	1.7-2.0	27.6	4.0	31.8	40.6	5	150 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5115	0.1-2.7	14.8	1.4	33	45	2.7-5.0	100-300	Ultra-High Linearity	3.0 QFN-16
GRF2114	0.1-2.7	17.9	0.93	24.3	40.2	1.8-5.0	30-150	Low Noise	2.0 DFN-8
GRF2133	0.4-2.7	28.5	0.65	20.3	30	1.8-5.0	30-160	Ultra-High Gain, Ultra-low Noise	1.5 DFN-6
GRF5110	1.5-2.7	15	0.9	28.8	45	2.7-5.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100		1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	Flat Gain	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	High Linearity, Low Noise	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	High Linearity, Low Noise	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	High Linearity, Low Noise	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise	1.5 DFN-6
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	High Linearity, Low Noise	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF4100*	0.1-3.8	16.5	3.4	22.5	31.5	2.7-5.0	20-40	High Gain, Internally Matched	1.5 DFN-6
GRF4200*	0.1-3.8	21.5	4	18	35.5	2.7-5.0	5-40	High Gain, Internally Matched	1.5 DFN-6
GRF4205*	0.4-3.8	20	4.5	30.5	51	3.0-9.0	500	High Reverse Isolation	3.0 QFN-16
GRF4012	0.4-4.2	17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise	1.5 DFN-6
GRF4012W	0.4-4.2	17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	Broadband, Low Noise, Internally Matched	1.5 DFN-6
GRF5236*	2.3-4.2	35	5.8	30	30	3.0-5.5	85-125	High Gain, Excellent Compression	3.0 QFN-16
GRF5123*	1.8-5.0	33/38	1.7	24	33	3.0-5.5	85-125	High Gain with Adjustable Settings, Low Noise	3.0 QFN-16
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	Low Noise	3.0 QFN-16
GRF4001	0.1-6.0	15.5	1	16.5	30.5	1.8-5.0	5-50	Low Noise	1.5 DFN-6
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	Low Noise	1.5 DFN-6
GRF4014W	0.1-6.0	17	0.8	24	39	3.0-8.0	30-130	Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Linearity	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60		1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, Broad Frequency Range, AEC-Q100 Automotive Qualified	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Linear Drivers with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF4042	0.4-2.7	16	0.9	22	36	1.8-5.0	20-180	Low Noise	2.0 QFN-12
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2043	0.05-6.0	18.4	1.6	22	37	2.7-5.0	20-100	Broad Frequency Range	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	Low Noise, Single Logic Control	1.5 DFN-6

Linear PAs

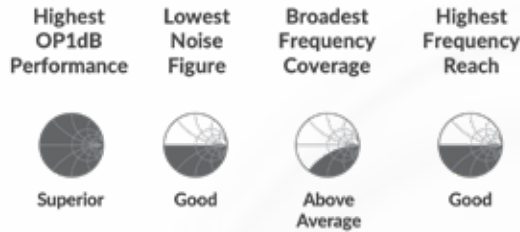

Linear Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Features	Package (mm)
GRF5605*	0.617-0.652	25 ¹	28.2	4.2	35.3	47.5	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5307*	0.617-0.862	20 ¹	35.6	3.6	32.9	39	5	150 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5506	0.66-0.72	24 ¹	28.4	4.5	33.3	46.8	5	290 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5606*	0.663-0.716	27 ¹	27.5	4.2	35.6	54.7	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5507	0.7-0.8	24 ¹	30.5	4.5	33.4	47.3	5	305 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5607*	0.709-0.748	27 ¹	28.2	4.1	35.7	51.3	5	210 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5508	0.8-0.9	24 ¹	29.7	4.5	33.1	45.4	5	302 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5608*	0.746-0.83	27 ¹	27.8	4.8	36.0	49.0	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5609*	0.814-0.862	26 ¹	27.8	4.6	35.7	49.4	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5510	0.88-0.96	24 ¹	29.2	4.5	33.8	46.1	5	352 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5109	0.4-1.5	17.9	1.2	28.3	45	2.7-5.0	50-200	Low Noise, Flexible Bias	3.0 QFN-16	
GRF5317*	1.7-2.0	18 ¹	27.6	4.0	31.8	40.6	5	150 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5517	1.7-1.8	22.5 ¹	27.5	5.4	32	48	5	305 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5617*	1.7-1.9	24.5 ¹	28.0	3.1	34.5	46.8	5	390 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5518	1.8-1.91	23 ¹	27	4.2	32	45	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5618*	1.8-1.92	25.5 ¹	24.5	4.2	35.9	47.7	5	380 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5519	1.92-2.0	23 ¹	26.5	4.1	32	45	5	310 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5619*	1.8-1.92	25.5 ¹	30.1	4.2	34.8	47	5	380 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5521	2.11-2.17	23 ¹	31	3.1	33	45	5	235 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5621*	2.11-2.17	25 ¹	31.5	3.1	35	47	5	380 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5526*	2.5-2.7	23 ¹	30	3.3	32.2	45	5	250 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5536*	3.3-4.2	23 ¹	27.3	4.1	32	45	5	280 ³	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5115	0.1-2.7	14.8	1.4	33	45	2.7-5.0	100-300	Low Noise, Flexible Bias	3.0 QFN-16	
GRF5112	1.5-2.7	17.5	1.55	32	41	2.7-5.0	300	Low Noise, Flexible Bias	3.0 QFN-16	
GRF5110	1.5-2.7	15	0.9	28.8	45	2.7-5.0	50-200	Low Noise, Flexible Bias	3.0 QFN-16	
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	Low Noise, Flexible Bias	1.5 DFN-6	
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	Low Noise, Flexible Bias	1.5 DFN-6	
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	Low Noise, Flexible Bias	3.0 QFN-16	
GRF4205*	0.4-3.8	20	4.5	30.5	51	3.0-9.0	500	High Gain, High Linearity, High Reverse Isolation, Flexible Bias	3.0 QFN-16	
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Gain, Low Noise, Flexible Bias	3.0 QFN-16	
GRF5558*	5.77-6.0	25.5 ²	27	4.5	32	45	5	590 ³	High Gain, High Linearity, Ideal for Automotive V2X	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: Rated P_{OUT} for DSRC/802.11p operation.

Note 3: I_{DD} with RF power applied.






Guerrilla Bloc™ Linear Power Amplifier Modules

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Features	Package (mm)
GRF5406*	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5407*	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5408*	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5410*	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5417*	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5418*	1.8-1.91	23	27	4.2	32	45	5	310 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5419*	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5421*	2.11-2.17	23	31	3.1	33	45	5	250 ²	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I_{DD} with RF power applied.

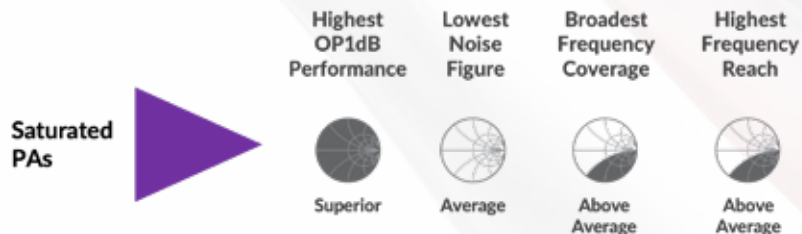

Saturated Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P _{OUT} (dBm)	Gain (dB)	OP1dB (dBm)	P _{SAT} (dBm)	PAE (%)	V _{DD} Range (V)	I _{DD} (mA)	Features	Package (mm)
GRF5504	0.4-0.5	35	41	34	35.5	64	3.5-5	120 ¹	High Efficiency, High Power	3.0 QFN-16
GRF5509	0.7-1.0	36	33.4	35.5	36.4	55	3.5-5	125 ¹	High Efficiency, High Power	3.0 QFN-16
GRF5529	2.95	33.5	29.5	4.5	34	57	3.5-5	110 ¹	High Efficiency, High Power, Ideal for Pulsed Operation	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Quiescent current.



RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Rated Power (W)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Special Features	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	1W	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	High Frequency Operation	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	1W	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	Failsafe Mode (Upon Loss of Power, RFC to RF1 Defaults to Open, RFC to RF2 Defaults to Close)	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Attenuation Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Special Features	Package (mm)
GRF6402*	0.05 – 6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	2.5	Rapid Fire Attenuation, Glitch-free Stepping, Addressability	3.0 QFN-16
GRF6403*	0.05 – 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	2.5	Rapid Fire Attenuation, Glitch-free Stepping	4.0 QFN-24
GRF6404*	0.05 – 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	2.5	Rapid Fire Attenuation, Glitch-free Stepping, Addressability	5.0 QFN-32

Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RF Power Detectors

Part Number	Detector Type	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Special Features	Package (mm)
GRF1201	Logarithmic Average Power Detector	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current	1.5 DFN-6
GRF1201W	Logarithmic Average Power Detector	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current, AEC-Q100 Automotive Qualified	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF7001	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
GRF7034*	Linear RX Mixer with Integrated LO Buffer and IF Amplifier	0.1-4.0	0.1-4.0	11.8	0	11	3	26	Ideal for RX Applications, IF Amplifier Integration	2.0 QFN-12
GRF7042*	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



AUTOMOTIVE SOLUTIONS



www.guerrilla-rf.com
Making Better Networks™



AEC-Q100 Automotive Qualified Devices

► Amplifiers

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
GRF2071W	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2073W	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2093W	Ultra-LNA	1.0-6.0	2300-2700	5V/70mA/2332.5MHz	21	0.37	19	36	2.7-5.0	30-100	Ultra-low Noise; High Gain	1.5 DFN-6
GRF2501W	Ultra-LNA	4.9-9.0	5100-5925	3.3V/15mA/5.5GHz	16	1	7	19	2.7-5.0	12-28	Broadband; Low Current	1.5 DFN-6
GRF4002W	Ultra-LNA / Linear Driver	0.1-3.8	700-3800	5V/70mA/2.5GHz	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity; Low Noise	1.5 DFN-6
GRF4012W	Broadband LNA / Linear Driver	0.4-4.2	2320-2345	5V/50mA/2332.5MHz	17.8	0.9	21	32	1.8-5.0	20-80	High Gain; Low Noise	1.5 DFN-6
GRF4014W	Broadband LNA / Linear Driver	0.1-6.0	1700-3800	5V/60mA/2332.5MHz	17	0.8	24	39	3.0-8.0	30-130	High Linearity; Low Noise; Broadband	1.5 DFN-6
GRF2243W*	LNA with Bypass	0.4-5.0	2300-2700	3.3V/15mA/2.5GHz	19.7	0.75	14	23	2.7-5.0	8-25	High Gain; Low Noise; Bypass	1.5 DFN-6
GRF2012W	Broadband Gain Block	0.05-6.0	400-3800	5V/90mA/900MHz	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain; High Linearity	1.5 DFN-6
GRF2013W	Broadband Gain Block	0.05-8.0	700-3800	5V/90mA/1.9GHz	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain; High Linearity	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

RF Power Detectors


Part Number	Detector Type	Frequency		RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Special Features	Package (mm)
		Range (GHz)	Range (GHz)								
GRF1201W	Logarithmic Average Power Detector	0.1-6.0		-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.






Automotive Solutions Overview

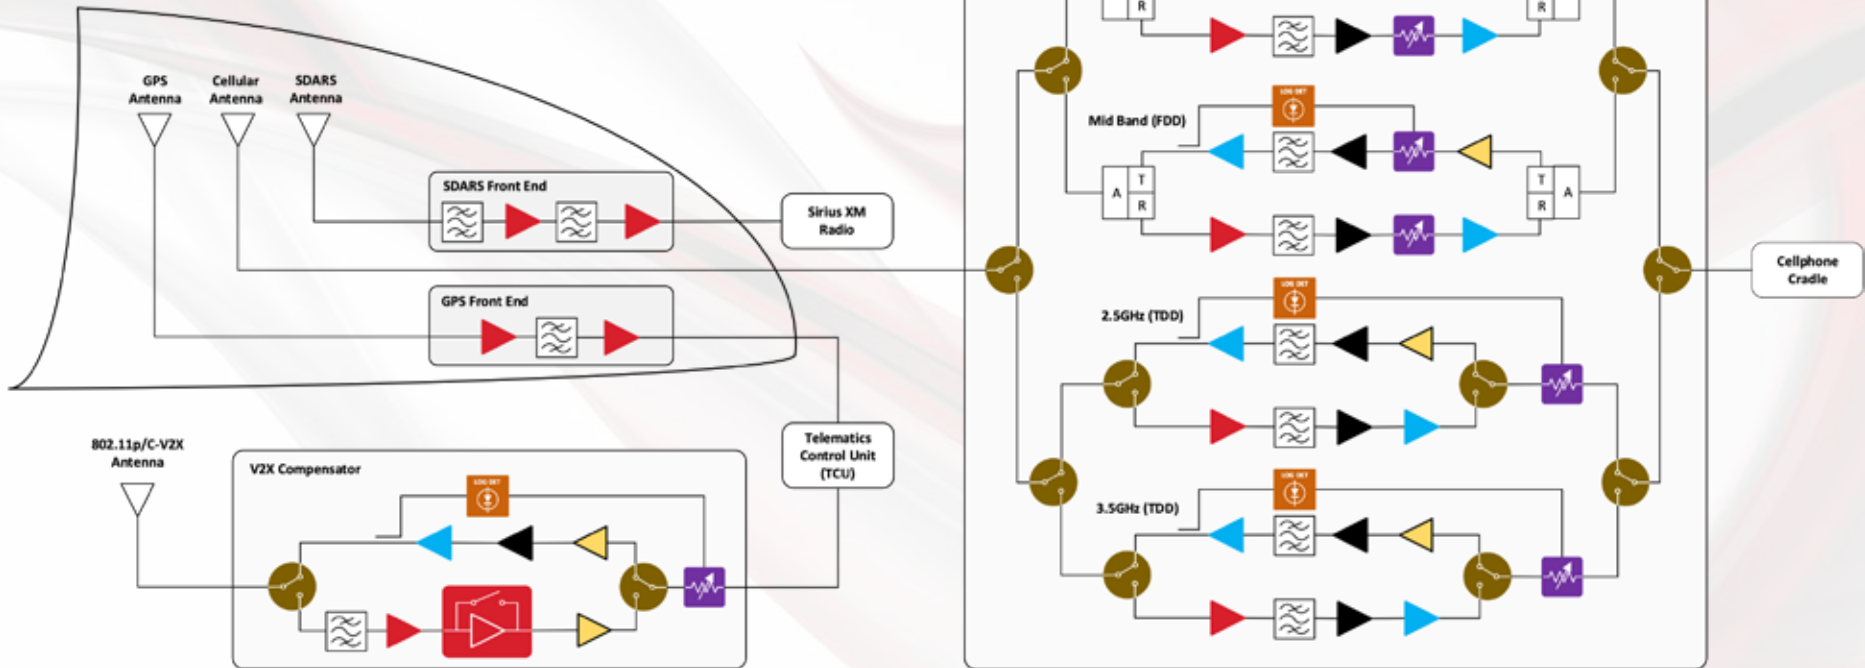



GPS/GNSS Front End Solutions

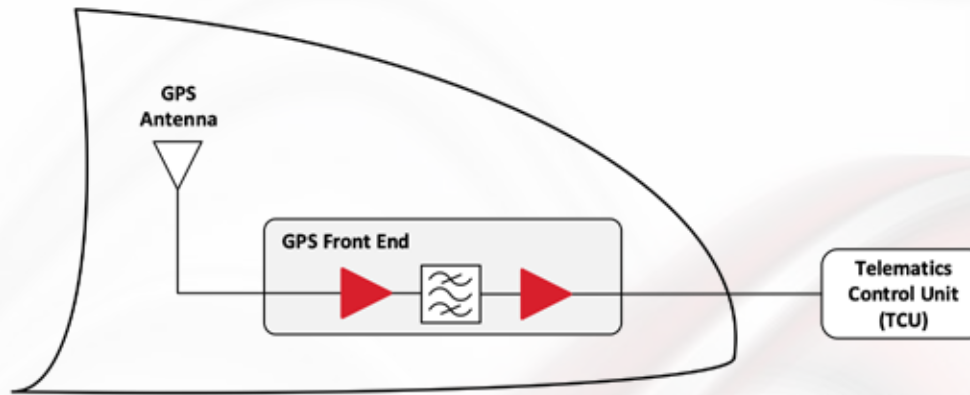

LNAs

Part Number	Device Type	Frequency Range (GHz)	Datasheet Tune (MHz)	Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Features	Package (mm)
GRF2070	Ultra-LNA	0.1-1.5	700-960	5V/70mA/900MHz	20.8	0.35	20	39.5	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2071	Ultra-LNA	0.7-2.7	2320-2345	5V/70mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2071W	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

GRF2071/2071W Performance with Single Match Tune for GPS/GNSS Bands L1, L2 & L5

Frequency (MHz)	V _{DD} (V)	I _{DDQ} (mA)	V _{EN} (V)	I _{EN} (mA)	P _{OUT} / Tone (dBm)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP1dB (dBm)	OP1dB (dBm)	NF (dB)
1100	5.0	61.4	5.0	2.5	0.0	22.9	12.4	35.3	-5.4	16.5	0.39
1200	5.0	61.4	5.0	2.5	0.0	22.7	13.9	36.6	-4.9	16.7	0.39
1300	5.0	61.4	5.0	2.5	0.0	22.2	14.6	36.9	-4.3	16.9	0.39
1400	5.0	61.5	5.0	2.5	0.0	21.7	16.0	37.7	-3.2	17.5	0.38
1500	5.0	61.5	5.0	2.5	0.0	21.0	17.1	38.2	-1.8	18.2	0.38
1600	5.0	61.5	5.0	2.5	0.0	20.3	18.6	38.9	-0.6	18.7	0.38
1700	5.0	61.6	5.0	2.5	0.0	19.6	19.9	39.5	0.7	19.3	0.38


GRF2070 Performance with Single Match Tune for GPS/GNSS Bands L1, L2 & L5

Frequency (MHz)	V _{DD} (V)	I _{DDQ} (mA)	V _{EN} (V)	I _{EN} (mA)	P _{OUT} / Tone (dBm)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP1dB (dBm)	OP1dB (dBm)	NF (dB)
1100	5.0	67.8	2.4	4	4.0	19.1	22.1	41.2	1.4	19.4	0.39
1300	5.0	67.8	2.4	4	4.0	18.0	23.8	41.8	3.0	19.9	0.42
1500	5.0	67.8	2.4	4	4.0	16.6	24.3	40.9	5.0	20.5	0.42
1700	5.0	67.8	2.4	4	4.0	15.2	26.3	41.5	6.4	20.6	0.42





SDARS Front End Solutions

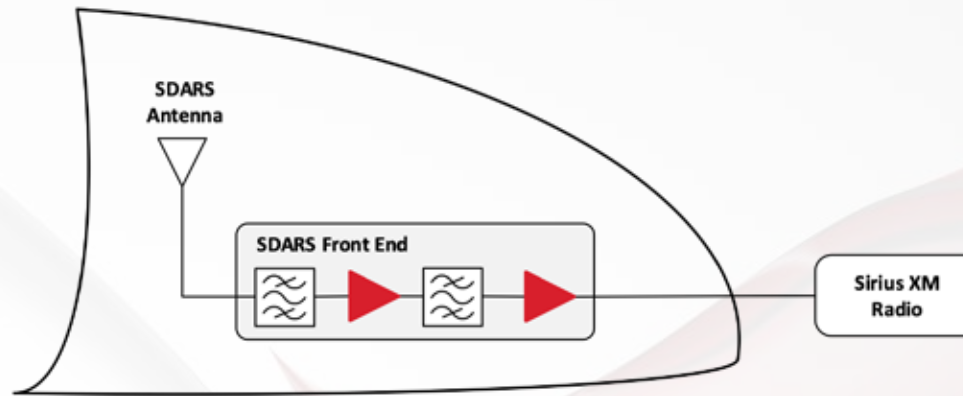

► First Stage LNAs

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
GRF2071W	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2073W	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2074	Ultra-LNA	1.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.35	17.5	35.5	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF2093W	Ultra-LNA	1.0-6.0	2300-2700	5V/70mA/2332.5MHz	21	0.37	19	36	2.7-5.0	30-100	Ultra-low Noise; High Gain	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

► Second Stage LNAs

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
GRF2073W	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
GRF4002W	Ultra-LNA / Linear Driver	0.1-3.8	700-3800	5V/70mA/2.5GHz	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity; Low Noise	1.5 DFN-6
GRF4012W	Broadband LNA / Linear Driver	0.4-4.2	2320-2345	5V/50mA/2332.5MHz	17.8	0.9	21	32	1.8-5.0	20-80	High Gain; Low Noise	1.5 DFN-6
GRF4014W	Broadband LNA / Linear Driver	0.1-6.0	1700-3800	5V/60mA/2332.5MHz	17	0.8	24	39	3.0-8.0	30-130	High Linearity; Low Noise; Broadband	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.





SDARS Front End Solutions, cont'd

Dual SAW Reference Design



Single SAW Reference Design





Cascaded Performance of GRF's SDARS Single and Dual SAW Front End Reference Designs

Config	First Stage LNA	2nd Stage LNA	Solution Cost Ranking	Performance Ranking	Key Differentiators	Maximum Blocker P_{IN} Meeting OOB Rejection	IMRR Margin to Spec (Typ)	IMRR Margin to Spec (Worst Case)	G (dB)	NF (dB)	IIP3 (dBm)	IP1dB (dBm)	V_{DD} (V)	I_{DD} (mA)
Dual SAW	2093W	4014W	5	1	Higher G, Best OOB Rejection, Best IMRR	10+	13	7.5	33.7	0.88	1.6	-10.9	5	100
	2074W	4014W	4	2	Performance Same as Above, GRF2074 Uses Common 2x2mm Pkg	10+	13	7.5	33.7	0.88	1.6	-10.9	5	100
	2073W	4002W	3	3	Cheaper Alternative	6	10	2.5	31	0.95	2	-7.5	5	100
	2073W	4012W	2	4	Cheaper Alternative, Slightly Higher Gain	5.5	10	2.5	32	0.95	-1	-10.5	5	100
Single SAW	2071W	2073W	1	5	Significant Cost Savings by Using Only 1 SAW Filter, Can Only be Used in Absence of Co-Located Cellular Antenna.	-5	7.5	2	33.6	0.78	1.6	-14.5	5	87





Cellular Compensator Solutions

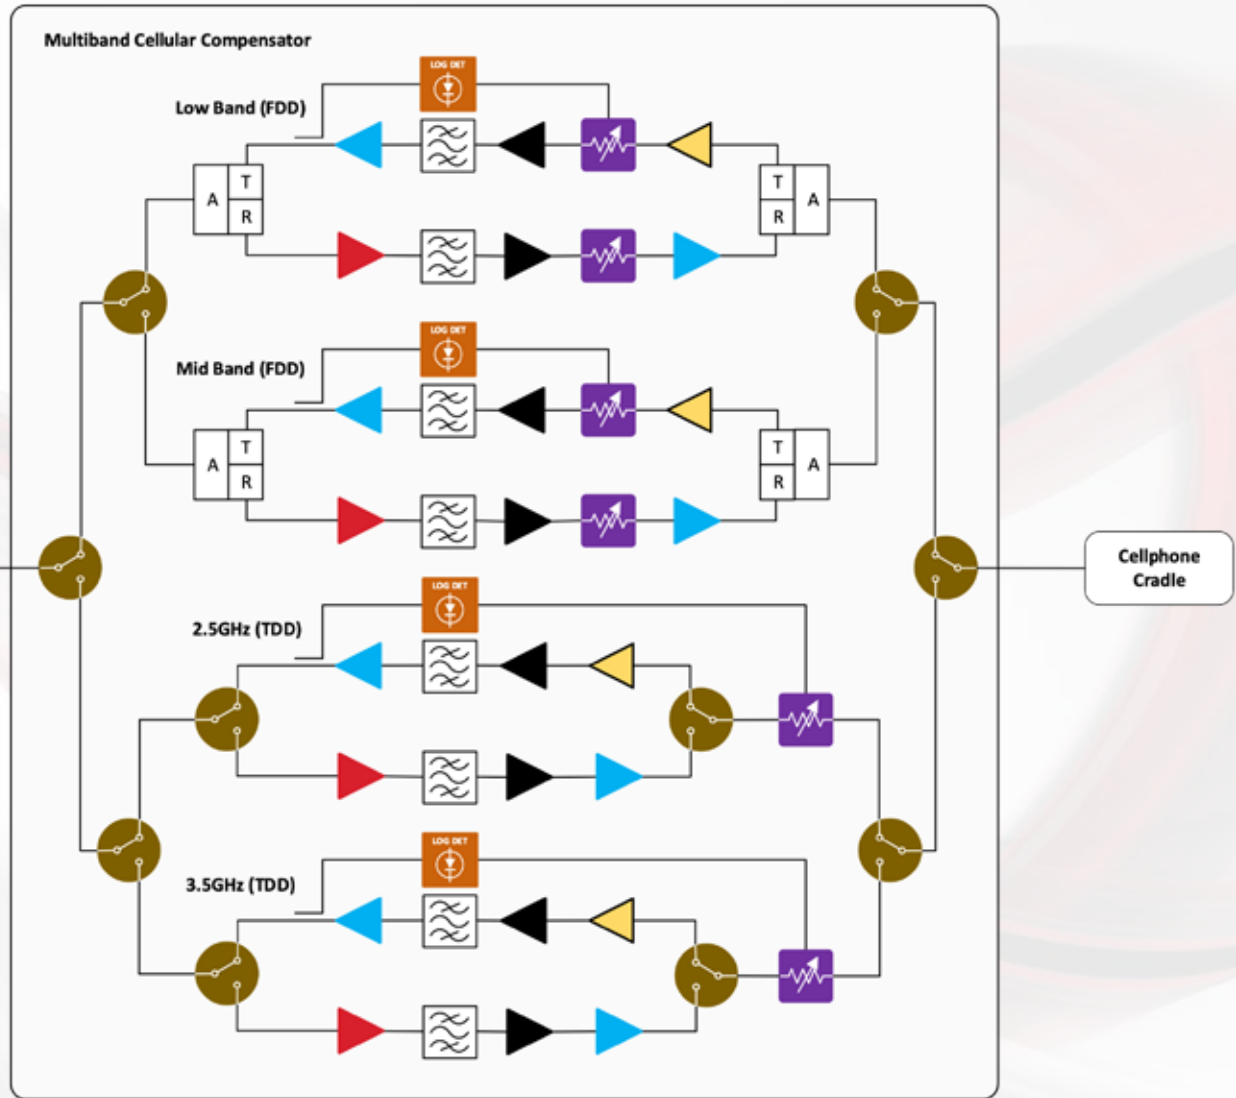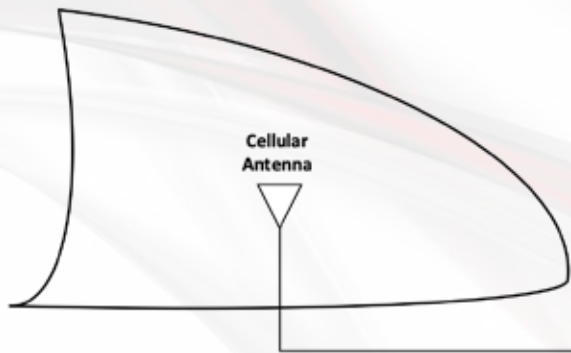

LNA

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071W	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	1.5 DFN-6
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073W	3.0-6.0	20.5	0.4	19.8	35	2.7-5.0	20-100	2.0 DFN-8

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	1.5 DFN-6
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} (V)	I _{DD} (mA)	Package (mm)
GRF5605*	0.62-0.65	25	28.2	4.2	35.3	47.5	5	310 ³	3.0 QFN-16
GRF5307*	0.62-0.86	20	35.6	3.6	32.9	39	5	150 ³	3.0 QFN-16
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.0 QFN-16
GRF5606*	0.66-0.72	27	27.5	4.2	35.6	54.7	5	310 ³	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.0 QFN-16
GRF5607*	0.71-0.75	27	28.2	4.1	35.7	51.3	5	210 ³	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.0 QFN-16
GRF5608*	0.75-0.83	27	27.8	4.8	36.0	49.0	5	310 ³	3.0 QFN-16
GRF5609*	0.81-0.86	26	27.8	4.6	35.7	49.4	5	310 ³	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.0 QFN-16
GRF5317*	1.7-2.0	18	27.6	4.0	31.8	40.6	5	150 ³	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.0 QFN-16
GRF5617*	1.7-1.9	24.5	28.0	3.1	34.5	46.8	5	390 ³	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.0 QFN-16
GRF5618*	1.8-1.92	25.5	24.5	4.2	35.9	47.7	5	380 ³	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.0 QFN-16
GRF5619*	1.8-1.92	25.5	30.1	4.2	34.8	47	5	380 ³	3.0 QFN-16
GRF5521	2.11-2.17	23	31	3.1	33	45	5	235 ²	3.0 QFN-16
GRF5621*	2.11-2.17	25	31.5	3.1	35	47	5	380 ³	3.0 QFN-16
GRF5526*	2.5-2.7	23	30	3.3	32.2	45	5	250 ²	3.0 QFN-16
GRF5536*	3.3-4.2	23	27.3	4.1	32	45	5	280 ²	3.0 QFN-16
GRF5406* ³	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.5 LFM
GRF5407* ³	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.5 LFM
GRF5408* ³	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.5 LFM
GRF5410* ³	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.5 LFM
GRF5417* ³	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.5 LFM
GRF5418* ³	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.5 LFM
GRF5419* ³	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.5 LFM
GRF5421* ³	2.11-2.17	23	31	3.1	33	45	5	250 ²	3.5 LFM

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I_{DD} with RF power applied.

Note 3: Module with Internal Matching.

DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6402*	0.05 - 6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RF Power Detectors

Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Package (mm)
GRF1201W	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	1.5 DFN-6


W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.





V2X Compensator Solutions

802.11p/C-V2X
Antenna

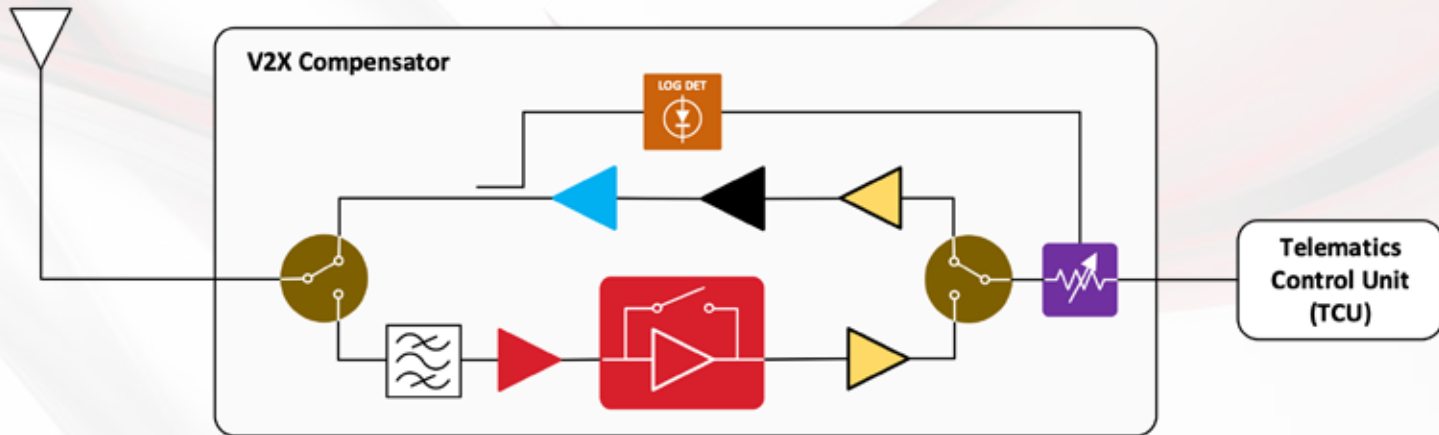

LNA

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093W	1.0-6.0	21	0.37	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2501W	4.9-6.0	16	1	7	19	2.7-5.0	12-28	1.5 DFN-6
GRF2101	4.0-10.0	18	0.9	10	22	2.7-5.0	12-28	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF4142 ¹	0.1-6.0	8	1.77	19.4	35.4	1.8-5.0	15-80	1.5 DFN-6
GRF2076 ²	0.6-6.0	14.2	1.7	18.5	39.1	2.7-5.0	20-100	1.5 DFN-6
GRF2543	4.9-6.0	14.4	1	13.4	25.5	2.7-5.0	15	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Performance with 5.7-5.9GHz tune.

Note 2: Performance with 5.5-6.0GHz tune.

High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Linear Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16	
GRF5558*	5.77-6.0	25.5	27	4.5	32	45	5	590 ²	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} for DSRC/802.11p operation.

Note 2: I_{DD} with RF power applied.

RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6402*	0.05 - 6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


RF Power Detectors

Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF1201W	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.




 **GUERILLARF**[®]

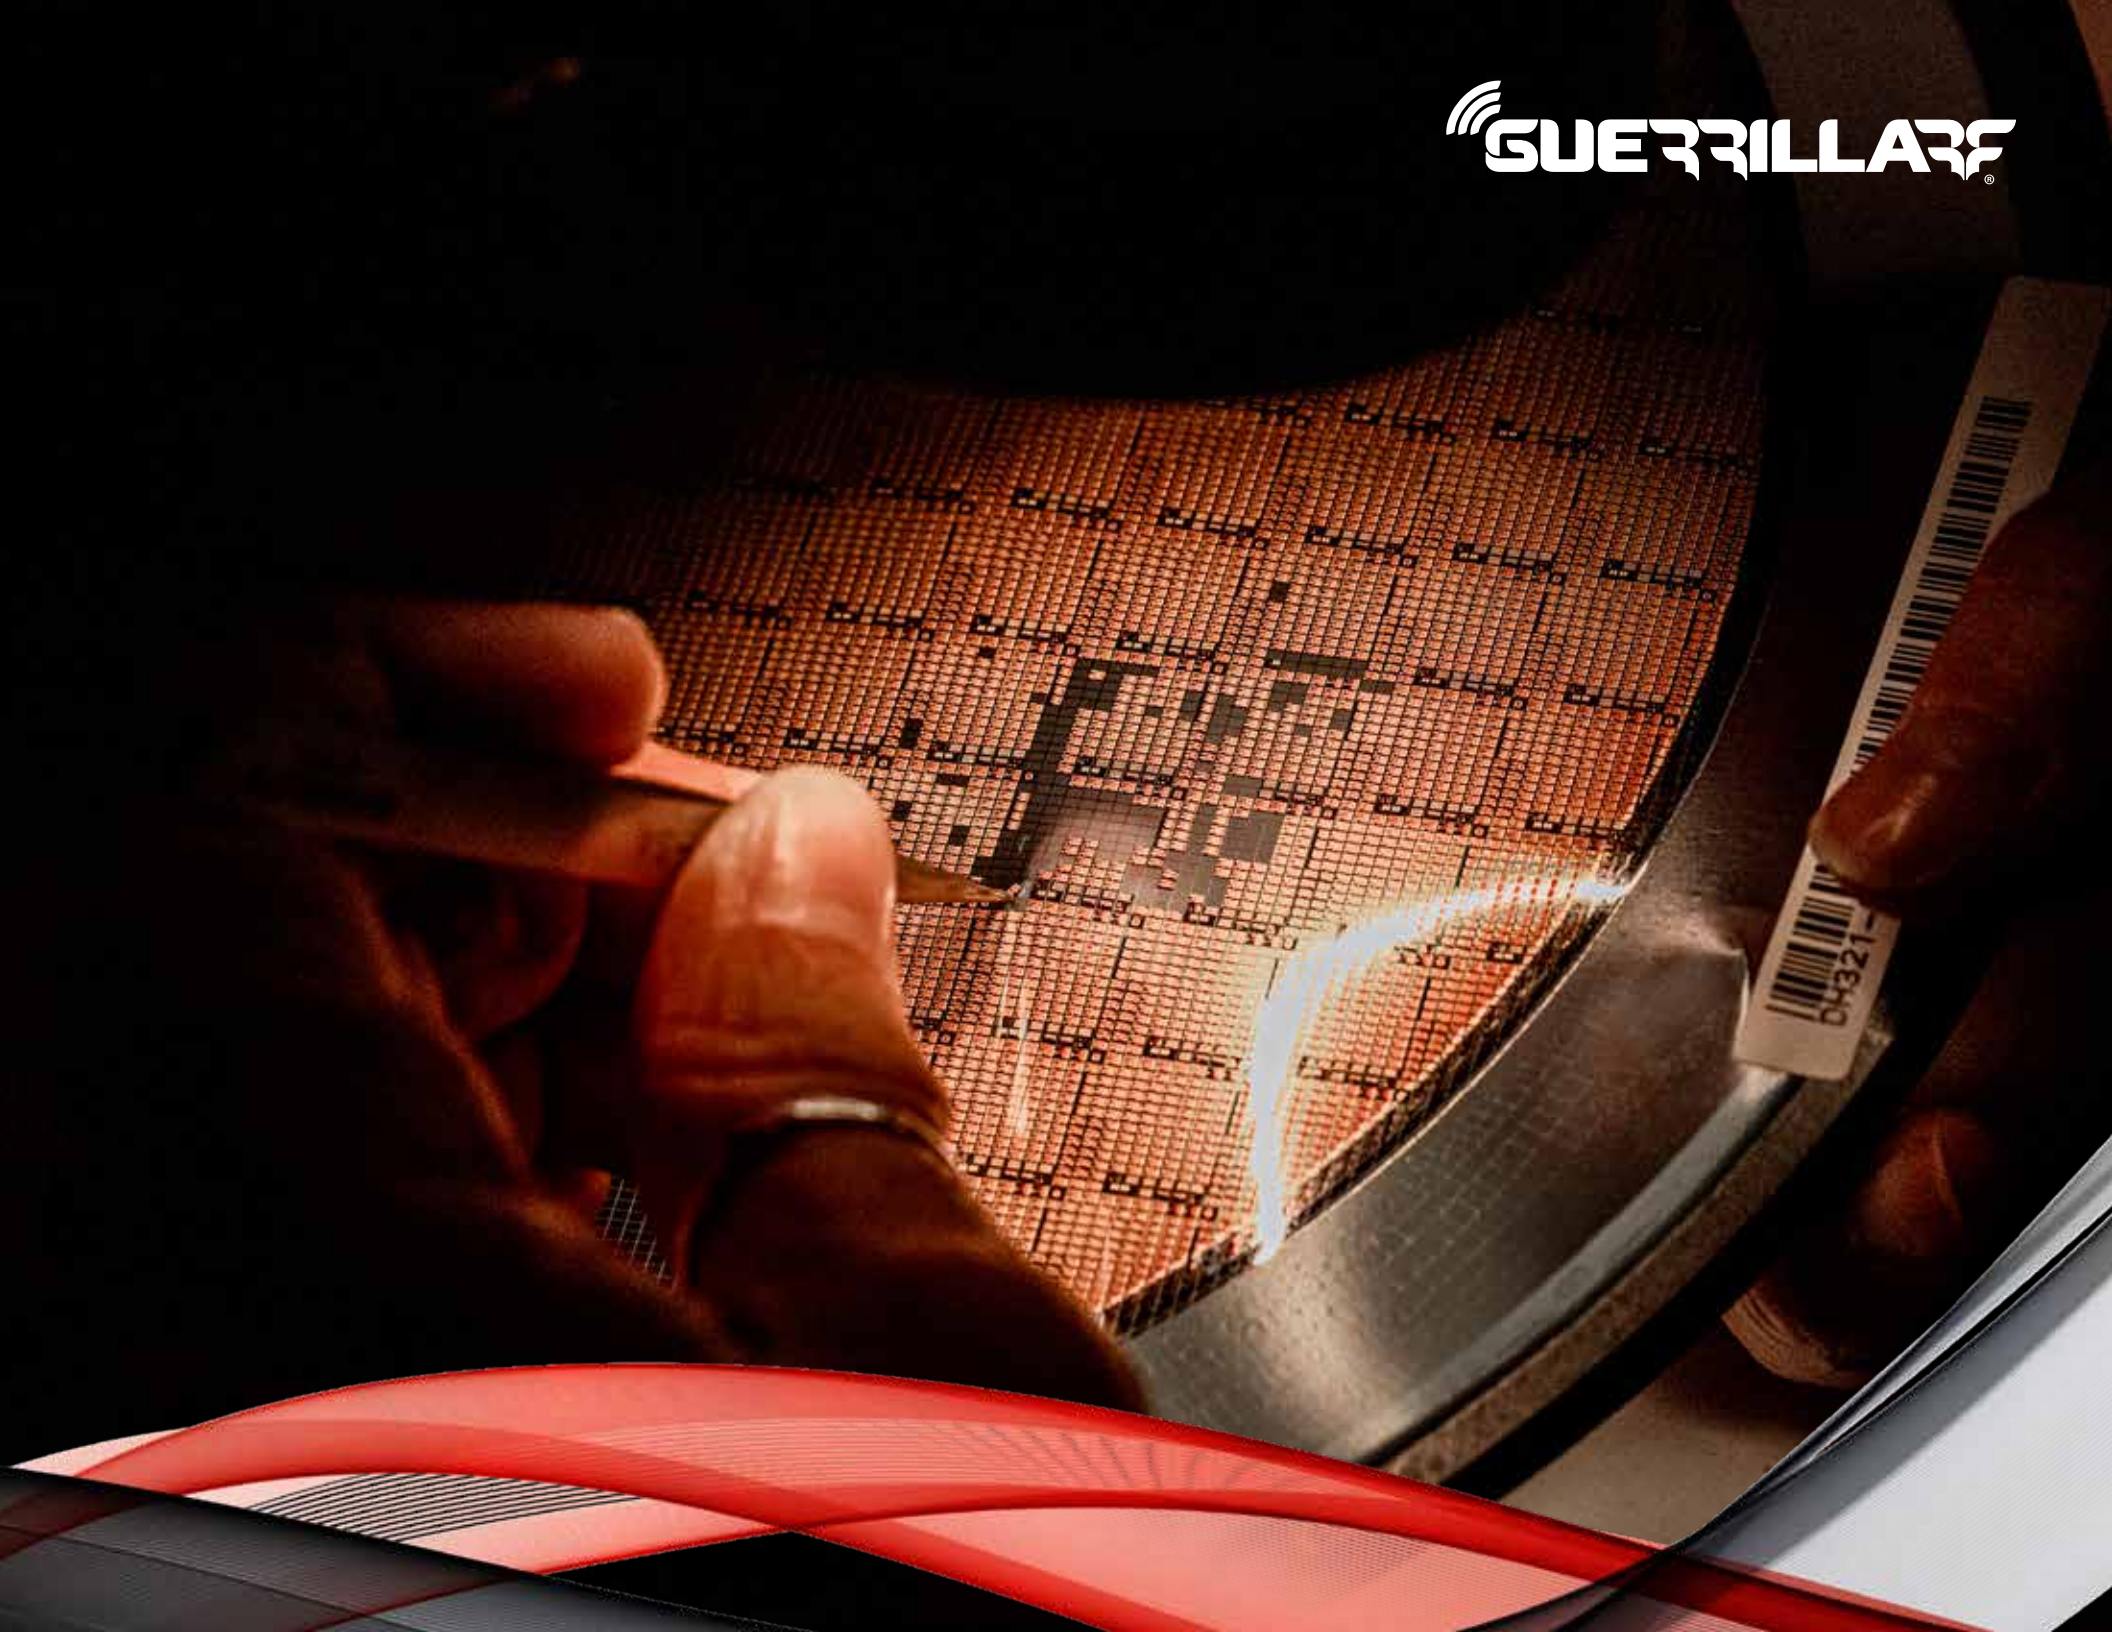




WIRELESS INFRASTRUCTURE SOLUTIONS

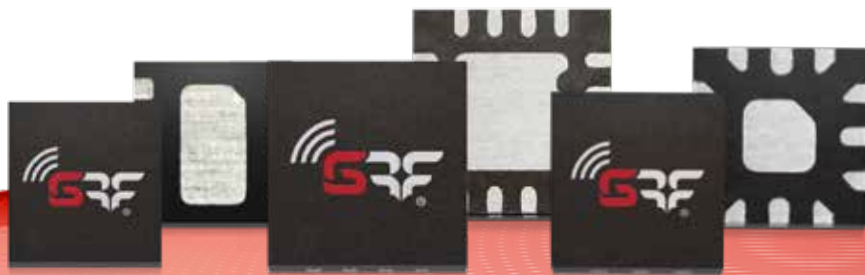

www.guerrilla-rf.com
Making Better Networks™

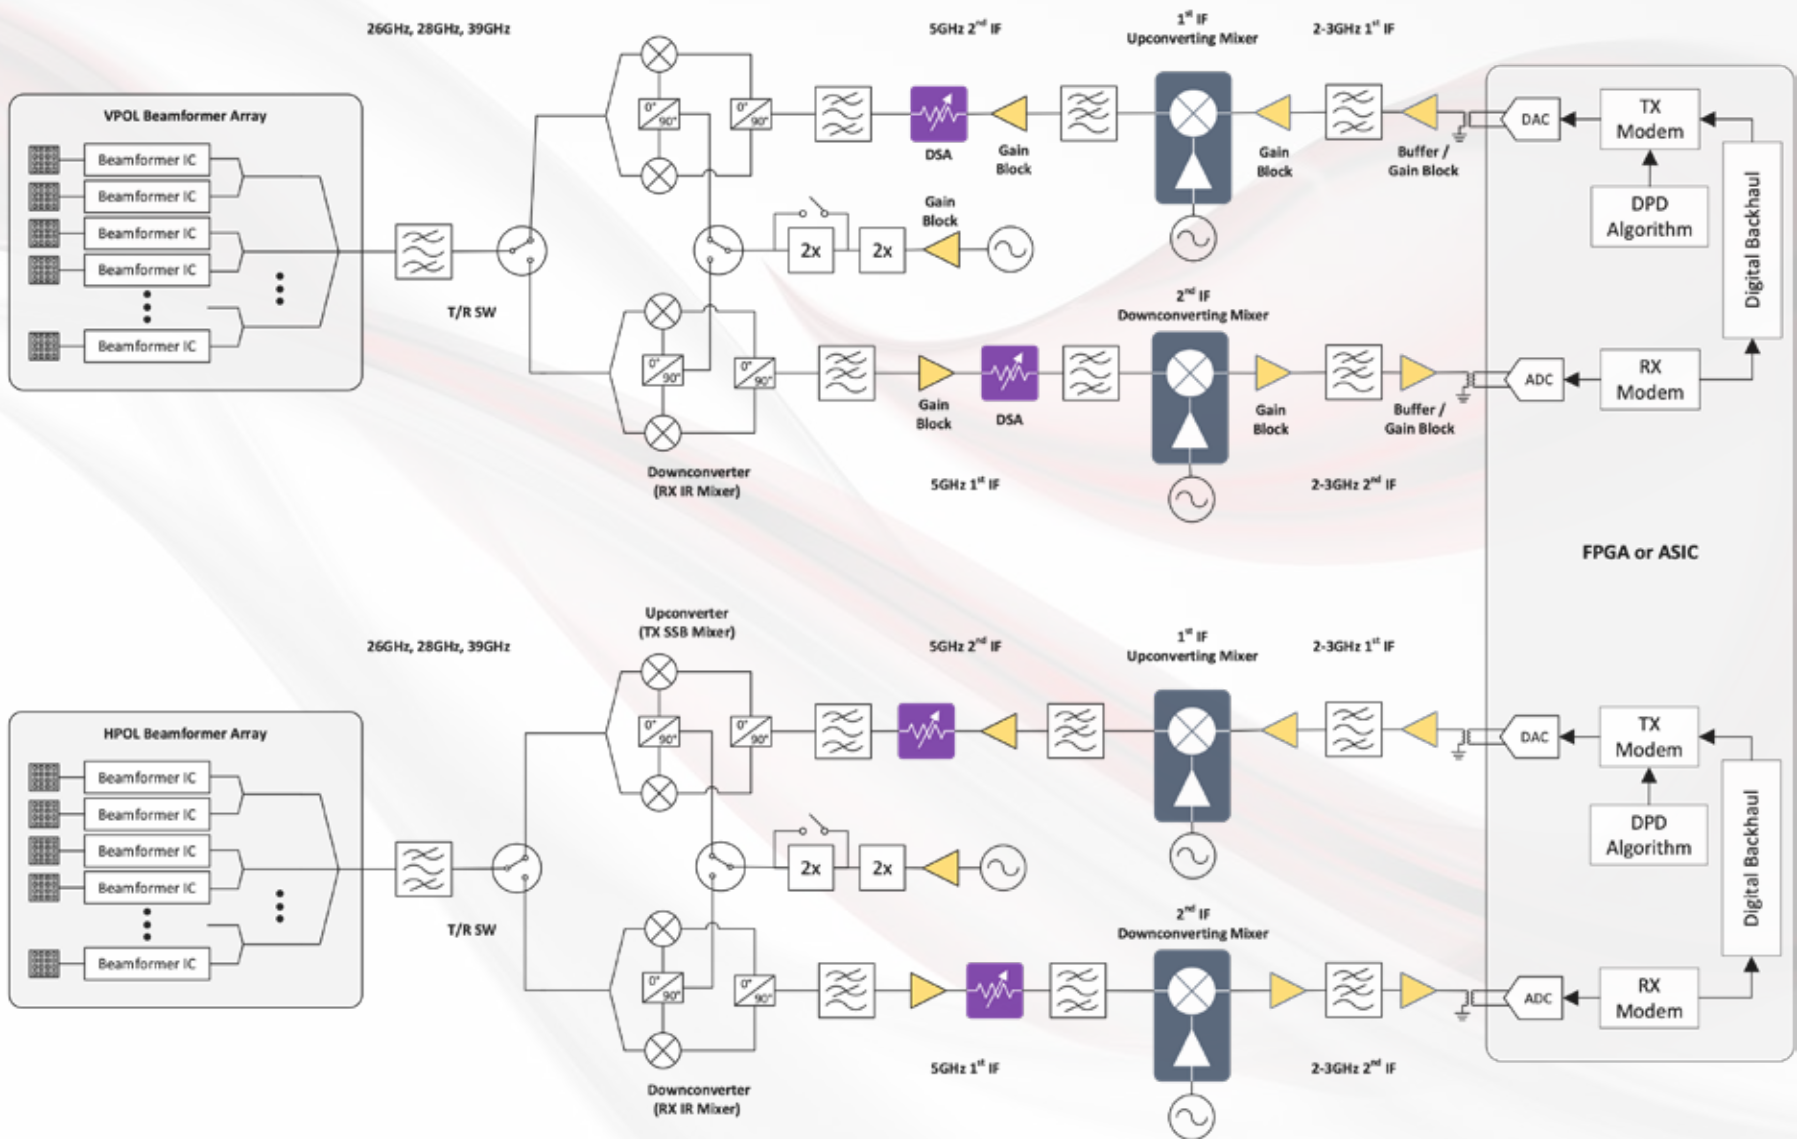

TX First IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

TX Second IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2505	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

LO Buffers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

Upconverting Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF7001	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
GRF7042*	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Downconverting Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Special Features	Package (mm)
GRF7001	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
GRF7034*	Linear RX Mixer with Integrated LO Buffer and IF Amplifier	0.1-4.0	0.1-4.0	11.8	0	11	3	26	Ideal for RX Applications, IF Amplifier Integration	2.0 QFN-12
GRF7042*	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RX First IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2505	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

RX Second IF - High Linearity Gain Blocks


Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

DSAs (Digital Step Attenuators)

Part Number	Frequency		Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
	Range (GHz)									
GRF6402*	0.05 - 6.0		31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0		31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0		31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

5G TDD mMIMO Solutions

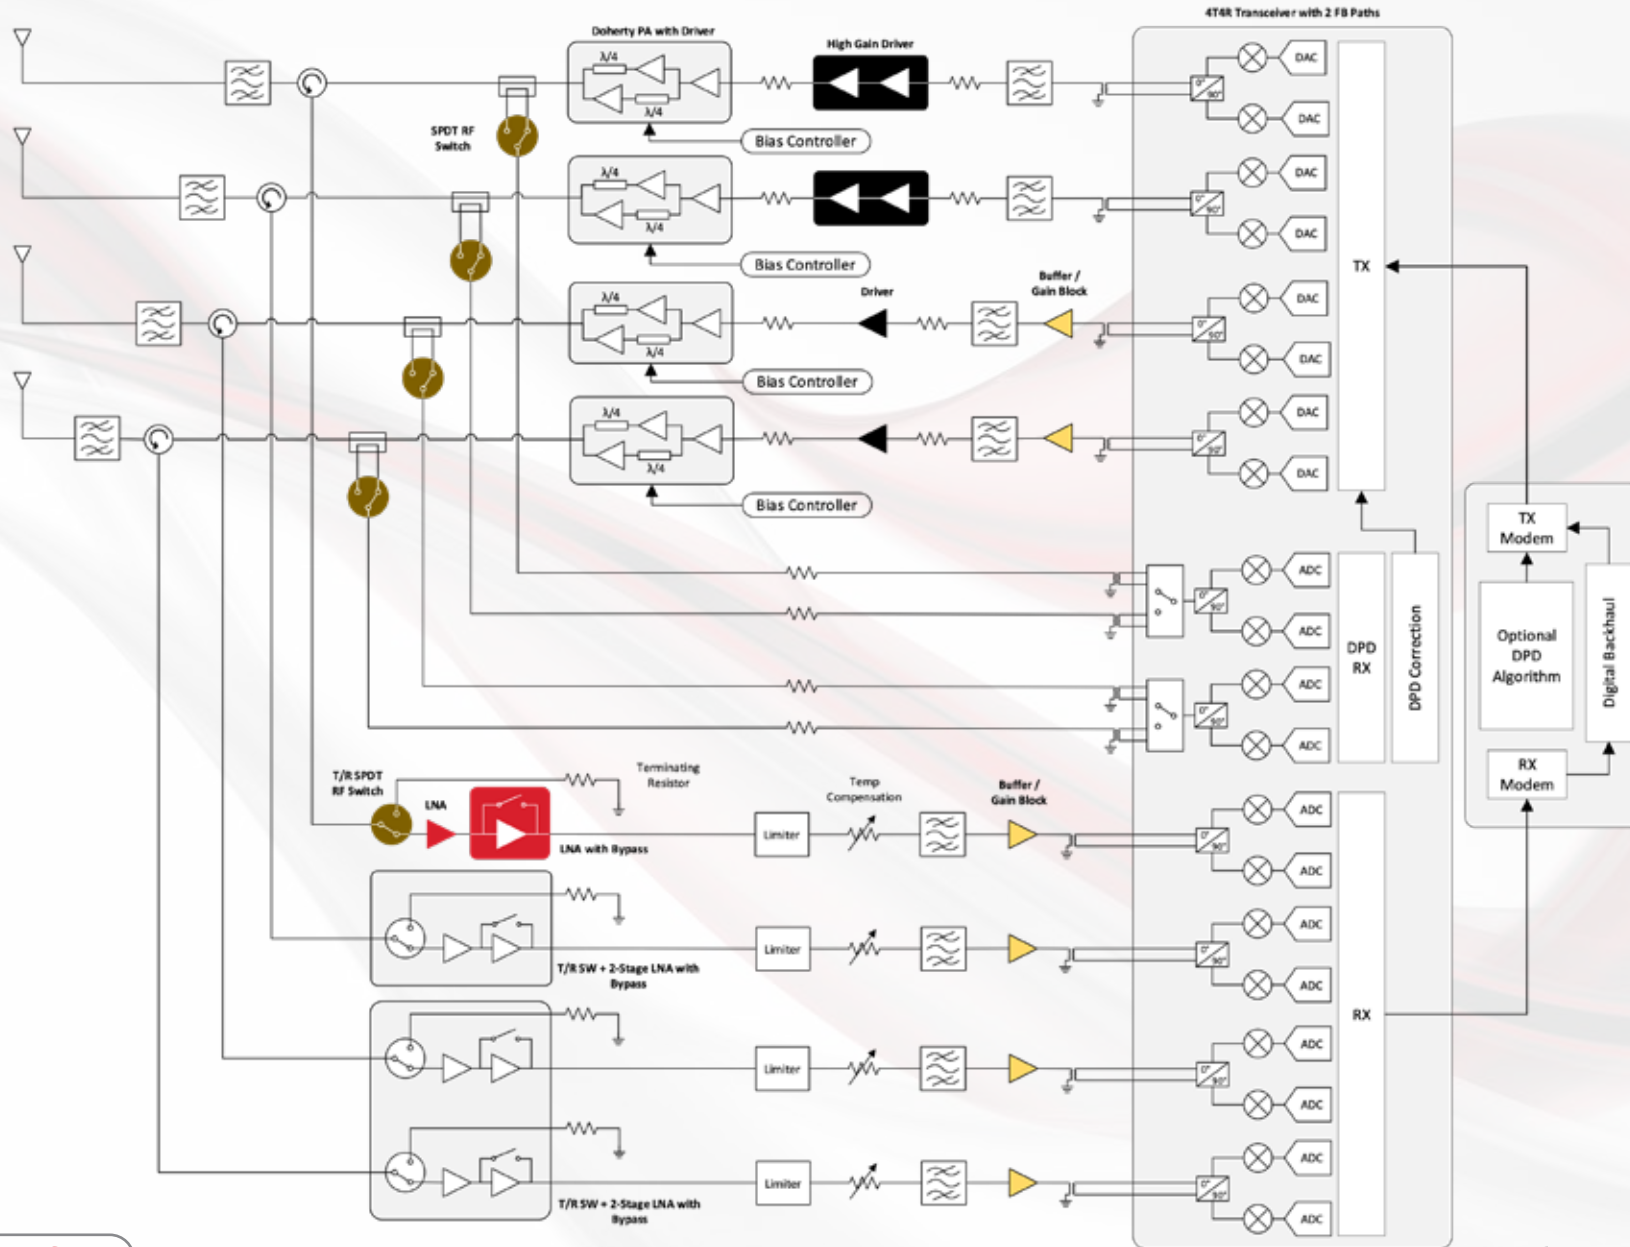

LNA

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076	0.6-6.0	17.2	1.1	21	41	2.7-5.0	20-100	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5236*	2.3-4.2	35	5.8	30	30	3.0-5.5	85-125	3.0 QFN-16
GRF5123*	1.8-5.0	33/38	1.7	24	33	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16


* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RF1 to RF2: RF2 to RF1:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RF1 to RF2: RF2 to RF1:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

5G FDD mMIMO Solutions

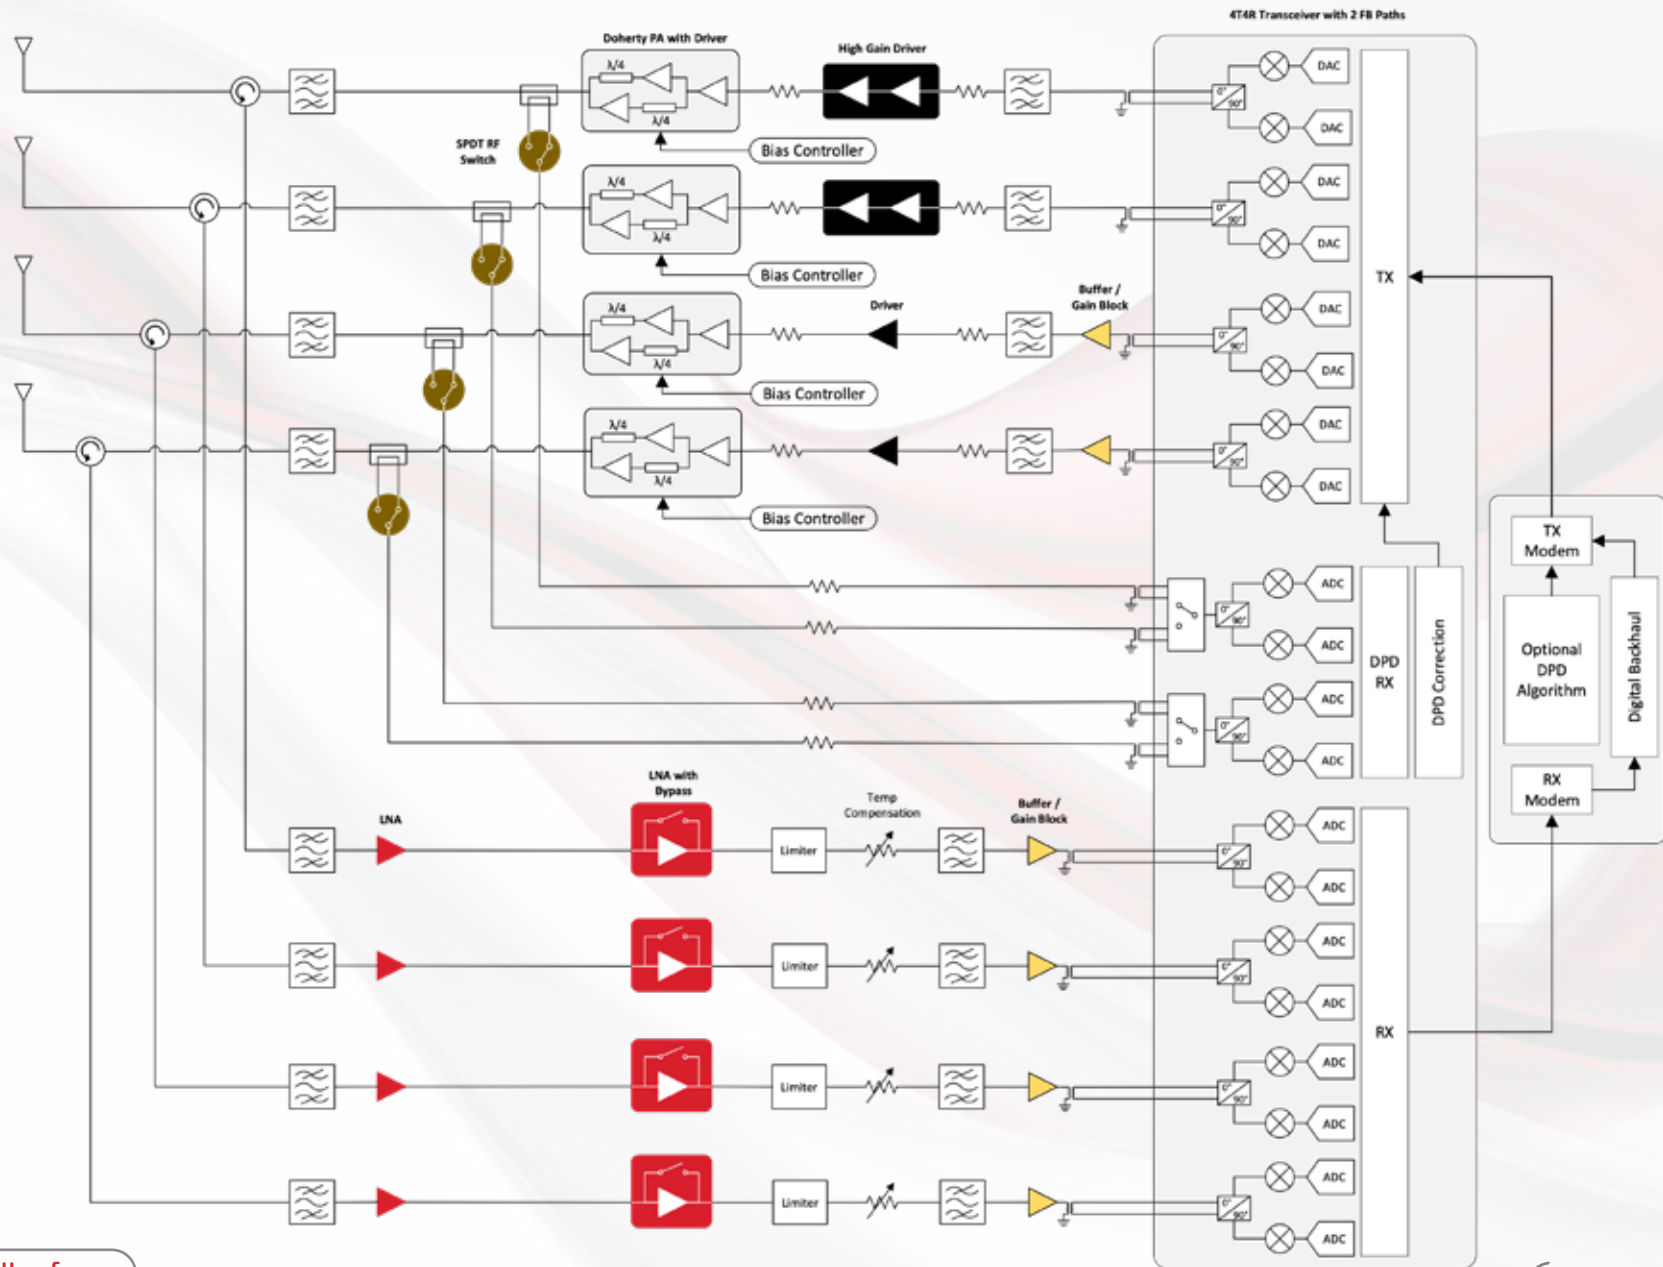

▶ LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0		20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

▶ LNAs with Bypass

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2042	0.05-6.0		15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0		15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076	0.6-6.0		17.2	1.1	21	41	2.7-5.0	20-100	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

▶ Linear Drivers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8		13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8		12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8		13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8		15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8		15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8		17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5236*	2.3-4.2		35	5.8	30	30	3.0-5.5	85-125	3.0 QFN-16
GRF5123*	1.8-5.0		33/38	1.7	24	33	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0		17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0		16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0		20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ RF Switches

Part Number	Switch Type	Frequency		Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
		Range (GHz)	Path					
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.






GUERRILLARF




4T4R/8T8R RRU SOLUTIONS

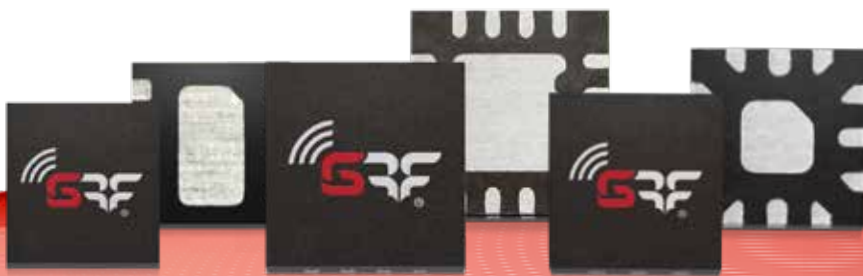

www.guerrilla-rf.com
Making Better Networks™



4T4R 8T8R TDD RRU Solutions

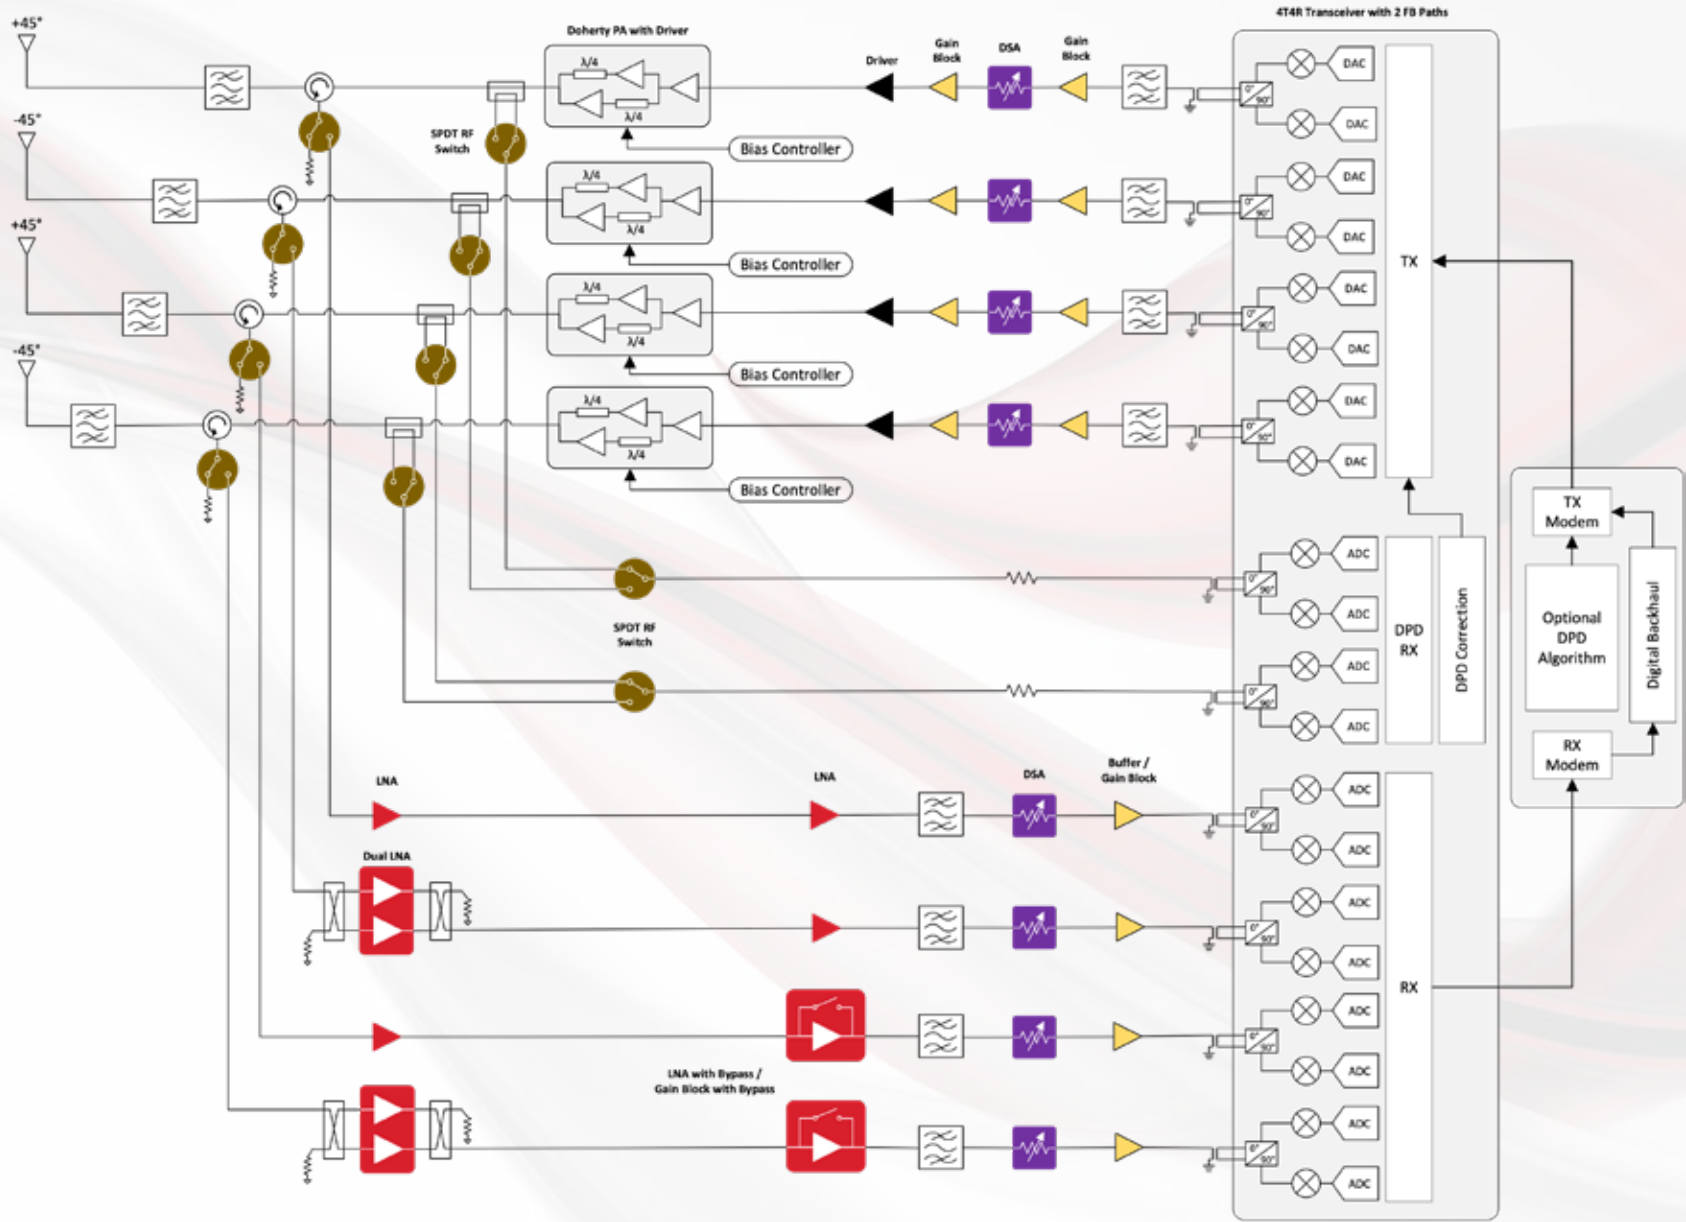

▶ LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0		20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

▶ Dual LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2078*	0.7-2.7		18.8	0.56	23.9	40.7	5	150	2.0 DFN-8

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ LNAs with Bypass

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2042	0.05-6.0		15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0		15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076	0.6-6.0		17.2	1.1	21	41	2.7-5.0	20-100	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

▶ Linear Drivers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8		13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8		12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8		13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8		15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8		15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8		17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5236*	2.3-4.2		35	5.8	30	30	3.0-5.5	85-125	3.0 QFN-16
GRF5123*	1.8-5.0		33/38	1.7	24	33	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0		17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0		16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0		20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ RF Switches

Part Number	Switch Type	Frequency		Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
		Range (GHz)	Path					
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ DSAs (Digital Step Attenuators)


Part Number	Frequency		Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
	Range (GHz)									
GRF6402*	0.05 - 6.0		31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0		31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0		31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.





4T4R 8T8R FDD RRU Solutions

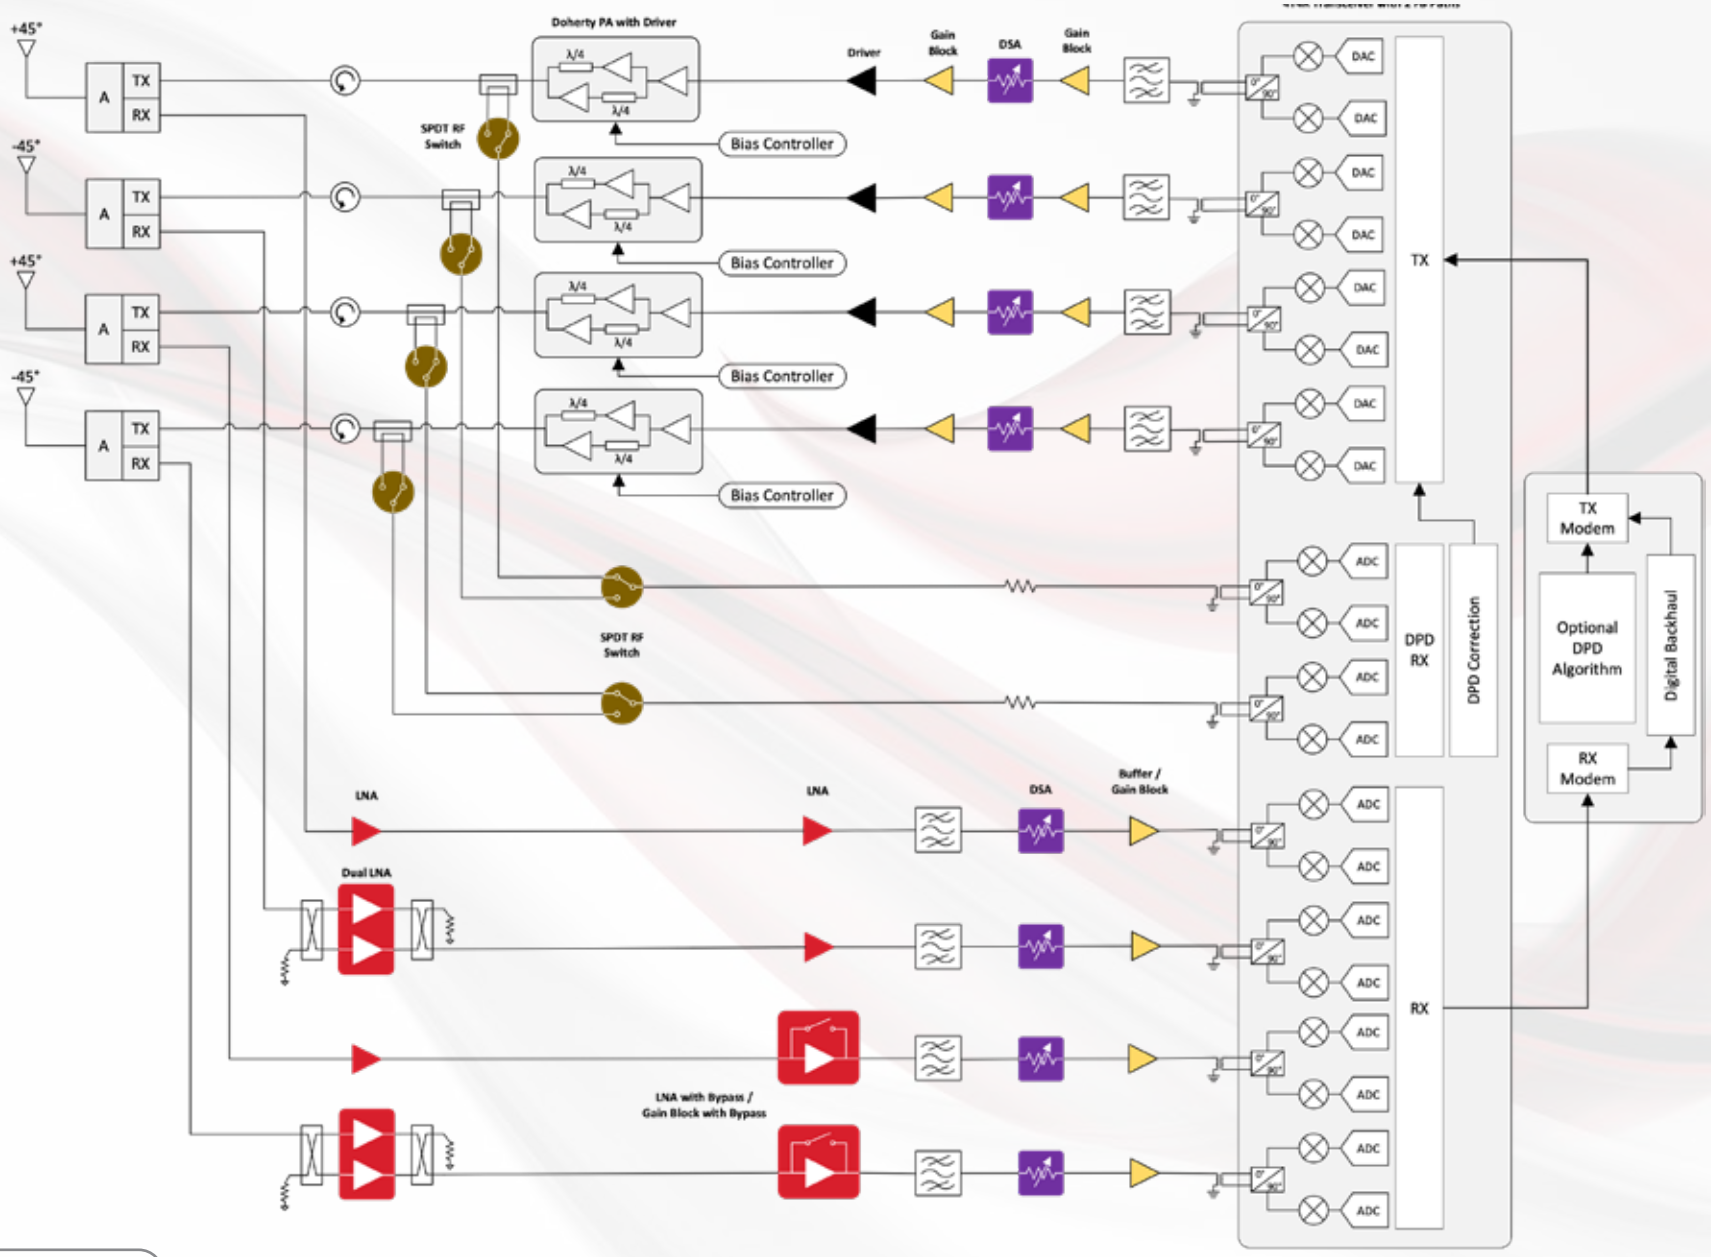

LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0		20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

Dual LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2078*	0.7-2.7		18.8	0.56	23.9	40.7	5	150	2.0 DFN-8

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

LNAs with Bypass

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2042	0.05-6.0		15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0		15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076	0.6-6.0		17.2	1.1	21	41	2.7-5.0	20-100	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8		19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0		18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

Linear Drivers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
	Range (GHz)								
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8		13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8		12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8		13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8		15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8		15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8		17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5236*	2.3-4.2		35	5.8	30	30	3.0-5.5	85-125	3.0 QFN-16
GRF5123*	1.8-5.0		33/38	1.7	24	33	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0		17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0		16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0		20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RF Switches

Part Number	Switch Type	Frequency		Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
		Range (GHz)	Path					
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6403*	0.05 - 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



 **GUERILLARF**[®]






SMALL CELL SOLUTIONS



www.guerrilla-rf.com
Making Better Networks™



Small Cell Solutions (with DPD)

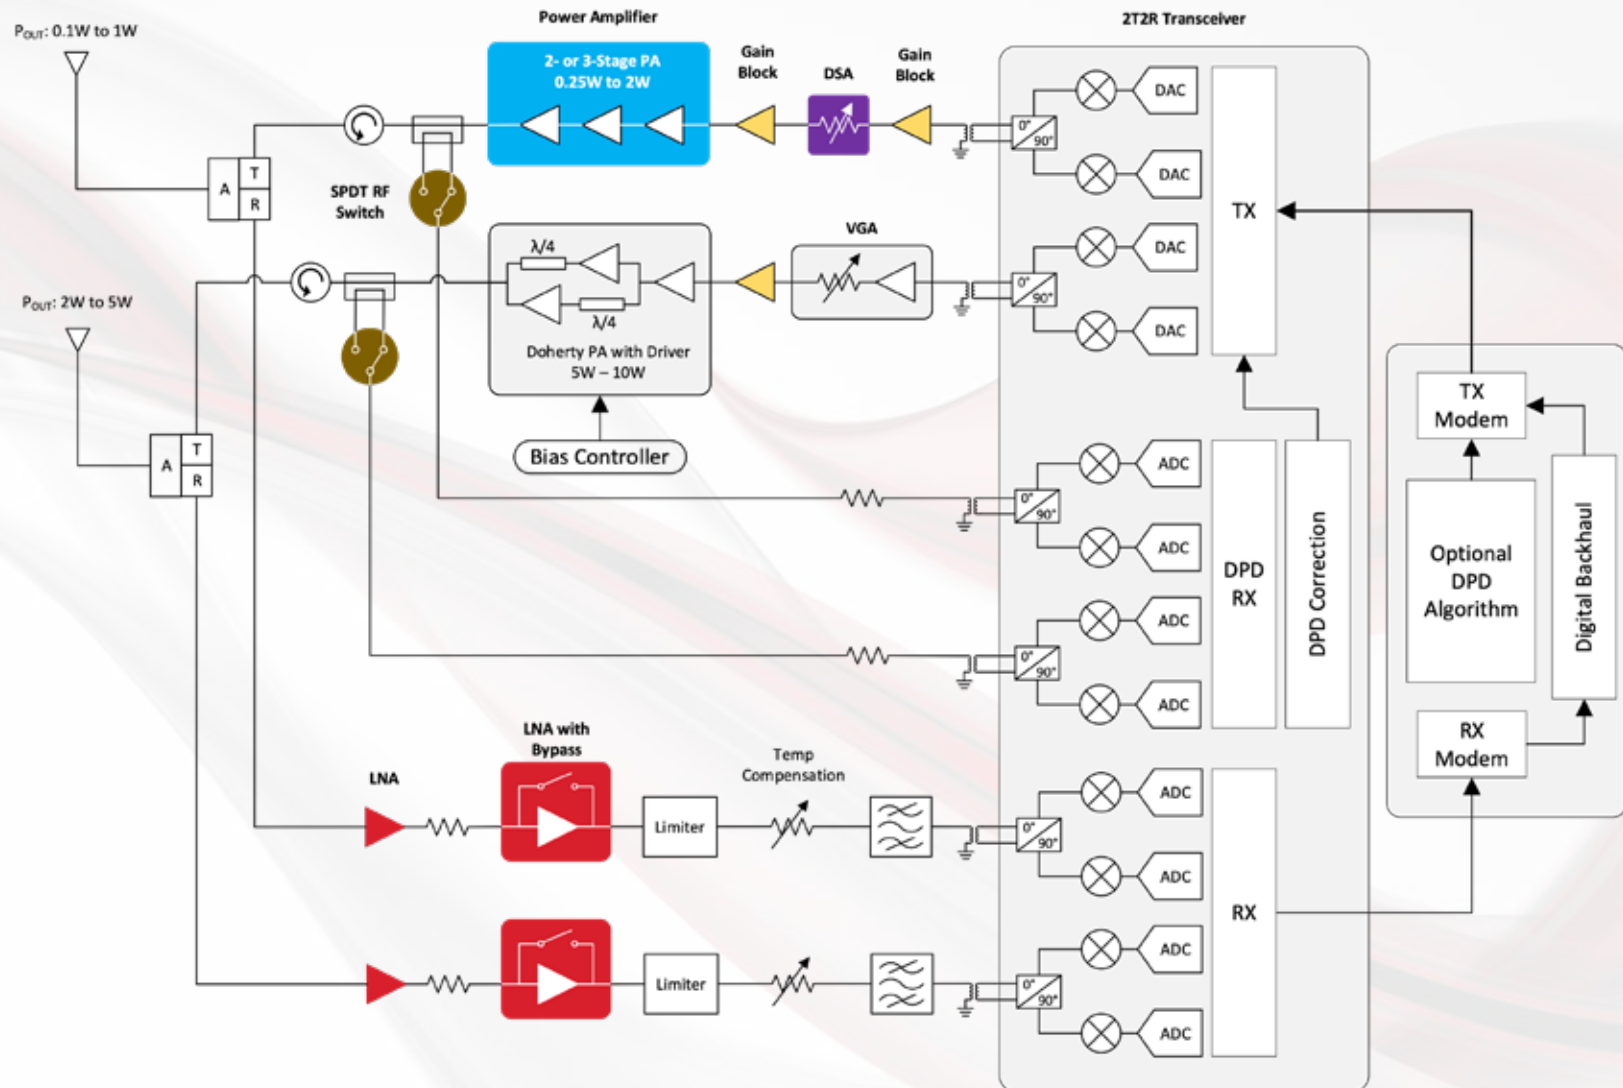

▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076	0.6-6.0	17.2	1.1	21	41	2.7-5.0	20-100	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6



▶ Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} (V)	I _{DD} (mA)	Package (mm)
GRF5605*	0.62-0.65	25	28.2	4.2	35.3	47.5	5	310 ³	3.0 QFN-16
GRF5307*	0.62-0.86	20	35.6	3.6	32.9	39	5	150 ³	3.0 QFN-16
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.0 QFN-16
GRF5606*	0.66-0.72	27	27.5	4.2	35.6	54.7	5	310 ³	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.0 QFN-16
GRF5607*	0.71-0.75	27	28.2	4.1	35.7	51.3	5	210 ³	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.0 QFN-16
GRF5608*	0.75-0.83	27	27.8	4.8	36.0	49.0	5	310 ³	3.0 QFN-16
GRF5609*	0.81-0.86	26	27.8	4.6	35.7	49.4	5	310 ³	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.0 QFN-16
GRF5317*	1.7-2.0	18	27.6	4.0	31.8	40.6	5	150 ³	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.0 QFN-16
GRF5617*	1.7-1.9	24.5	28.0	3.1	34.5	46.8	5	390 ³	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.0 QFN-16
GRF5618*	1.8-1.92	25.5	24.5	4.2	35.9	47.7	5	380 ³	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.0 QFN-16
GRF5619*	1.8-1.92	25.5	30.1	4.2	34.8	47	5	380 ³	3.0 QFN-16
GRF5521	2.11-2.17	23	31	3.1	33	45	5	235 ²	3.0 QFN-16
GRF5621*	2.11-2.17	25	31.5	3.1	35	47	5	380 ³	3.0 QFN-16
GRF5526*	2.5-2.7	23	30	3.3	32.2	45	5	250 ²	3.0 QFN-16
GRF5536*	3.3-4.2	23	27.3	4.1	32	45	5	280 ²	3.0 QFN-16
GRF5406* ³	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.5 LFM
GRF5407* ³	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.5 LFM
GRF5408* ³	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.5 LFM
GRF5410* ³	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.5 LFM
GRF5417* ³	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.5 LFM
GRF5418* ³	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.5 LFM
GRF5419* ³	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.5 LFM
GRF5421* ³	2.11-2.17	23	31	3.1	33	45	5	250 ²	3.5 LFM

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I_{DD} with RF power applied.

Note 3: Module with Internal Matching.

▶ RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFc to RF1: RFc to RF2:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RFc to RF1: RFc to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6


▶ DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6402*	0.05 - 6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



Picocell/Femtocell Solutions

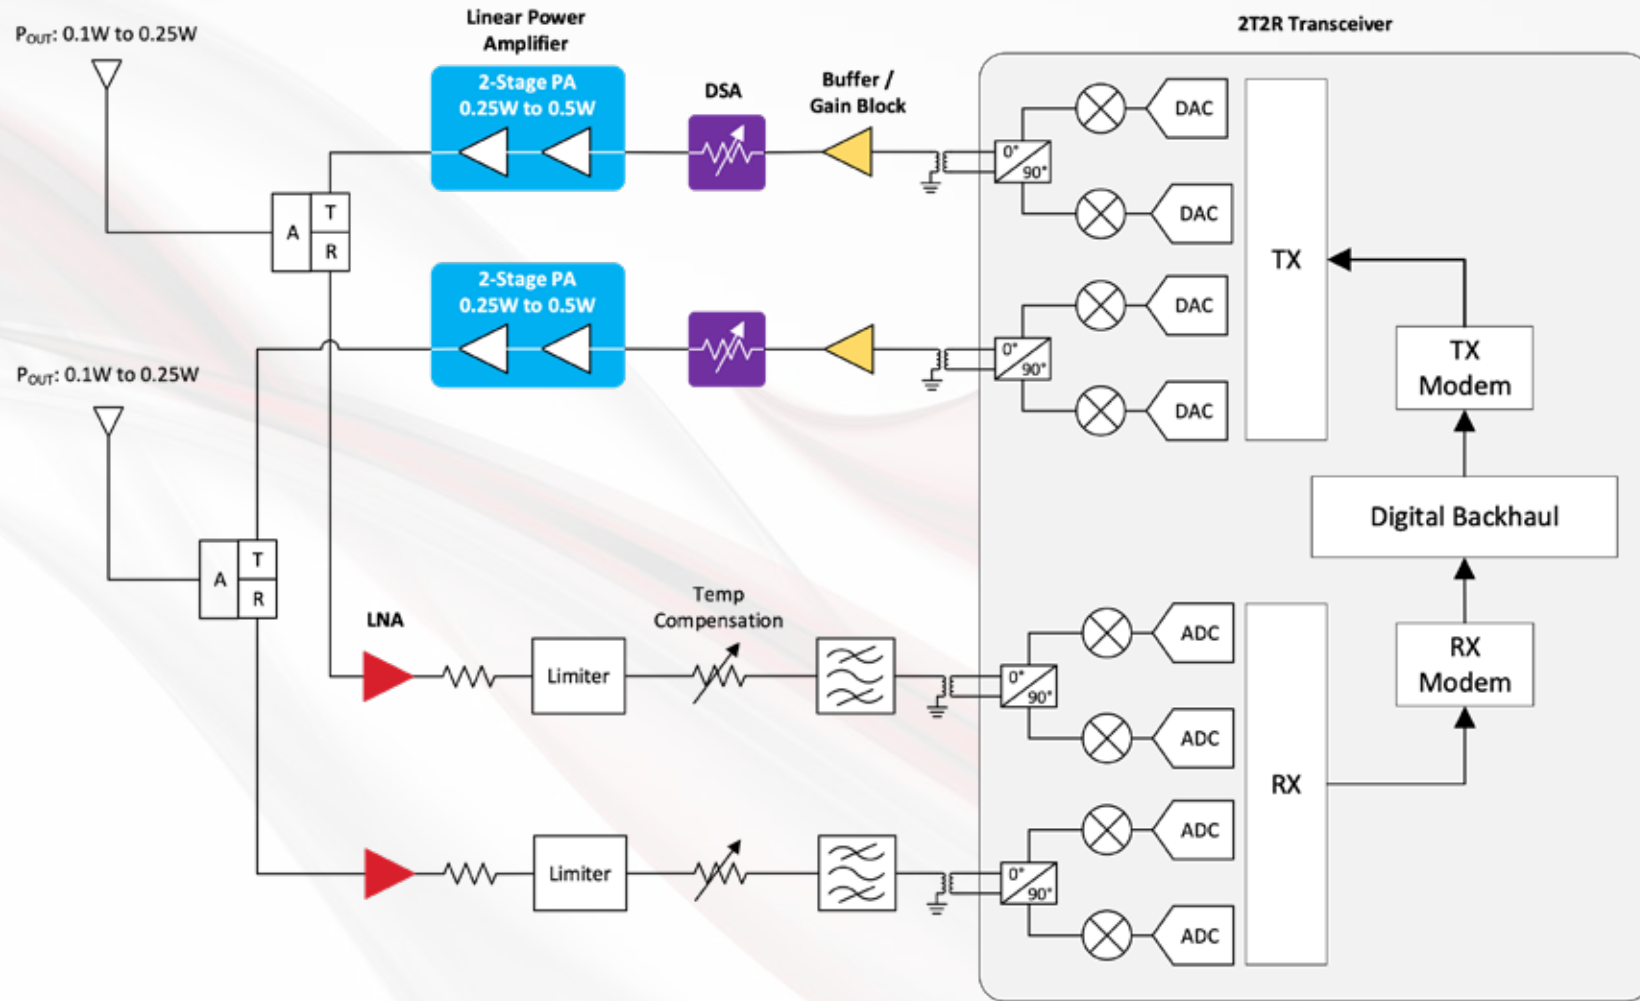

▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

▶ Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P _{OUT} ¹ (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} (V)	I _{DD} (mA)	Package (mm)
GRF5605*	0.62-0.65	25	28.2	4.2	35.3	47.5	5	310 ³	3.0 QFN-16
GRF5307*	0.62-0.86	20	35.6	3.6	32.9	39	5	150 ³	3.0 QFN-16
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.0 QFN-16
GRF5606*	0.66-0.72	27	27.5	4.2	35.6	54.7	5	310 ³	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.0 QFN-16
GRF5607*	0.71-0.75	27	28.2	4.1	35.7	51.3	5	210 ³	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.0 QFN-16
GRF5608*	0.75-0.83	27	27.8	4.8	36.0	49.0	5	310 ³	3.0 QFN-16
GRF5609*	0.81-0.86	26	27.8	4.6	35.7	49.4	5	310 ³	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.0 QFN-16
GRF5317*	1.7-2.0	18	27.6	4.0	31.8	40.6	5	150 ³	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.0 QFN-16
GRF5617*	1.7-1.9	24.5	28.0	3.1	34.5	46.8	5	390 ³	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.0 QFN-16
GRF5618*	1.8-1.92	25.5	24.5	4.2	35.9	47.7	5	380 ³	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.0 QFN-16
GRF5619*	1.8-1.92	25.5	30.1	4.2	34.8	47	5	380 ³	3.0 QFN-16
GRF5521	2.11-2.17	23	31	3.1	33	45	5	235 ²	3.0 QFN-16
GRF5621*	2.11-2.17	25	31.5	3.1	35	47	5	380 ³	3.0 QFN-16
GRF5526*	2.5-2.7	23	30	3.3	32.2	45	5	250 ²	3.0 QFN-16
GRF5536*	3.3-4.2	23	27.3	4.1	32	45	5	280 ²	3.0 QFN-16
GRF5406* ³	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.5 LFM
GRF5407* ³	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.5 LFM
GRF5408* ³	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.5 LFM
GRF5410* ³	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.5 LFM
GRF5417* ³	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.5 LFM
GRF5418* ³	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.5 LFM
GRF5419* ³	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.5 LFM
GRF5421* ³	2.11-2.17	23	31	3.1	33	45	5	250 ²	3.5 LFM

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I_{DD} with RF power applied.

Note 3: Module with Internal Matching.

▶ DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6402*	0.05-6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05-6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05-6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32


* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.








CELLULAR REPEATERS/BOOSTERS/DAS SOLUTIONS

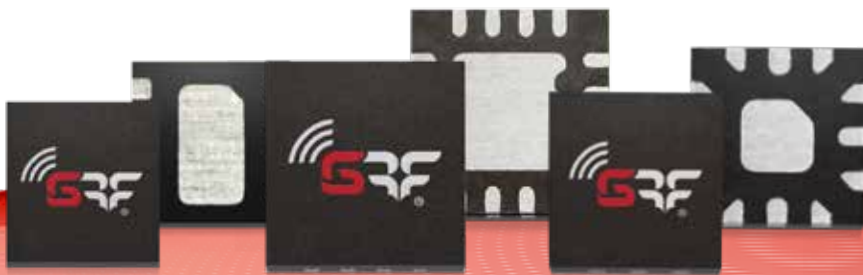

www.guerrilla-rf.com
Making Better Networks™



Multi-Band Cellular Repeater/Booster/DAS Solutions

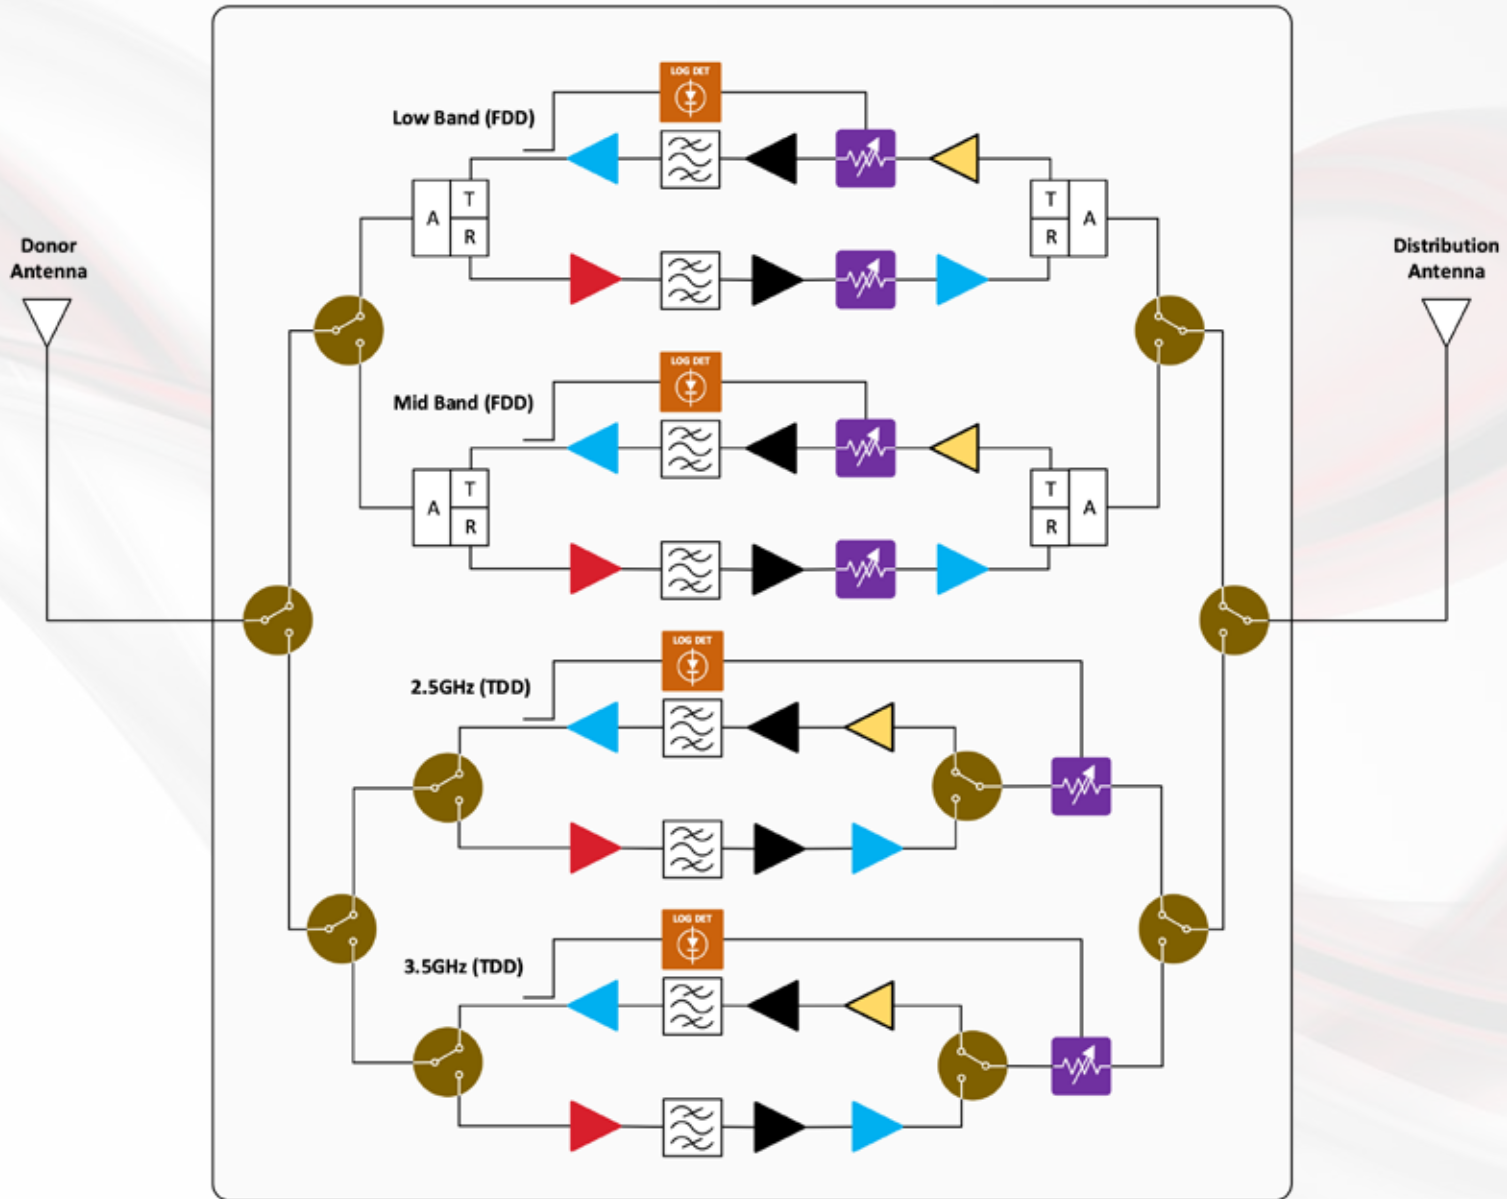

LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	1.5 DFN-6
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	I _{DD} Range (mA)	Package (mm)
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P _{OUT} (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V _{DD} (V)	I _{DD} (mA)	Package (mm)
GRF5605*	0.62-0.65	25	28.2	4.2	35.3	47.5	5	310 ³	3.0 QFN-16
GRF5307*	0.62-0.86	20	35.6	3.6	32.9	39	5	150 ³	3.0 QFN-16
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.0 QFN-16
GRF5606*	0.66-0.72	27	27.5	4.2	35.6	54.7	5	310 ³	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.0 QFN-16
GRF5607*	0.71-0.75	27	28.2	4.1	35.7	51.3	5	210 ³	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.0 QFN-16
GRF5608*	0.75-0.83	27	27.8	4.8	36.0	49.0	5	310 ³	3.0 QFN-16
GRF5609*	0.81-0.86	26	27.8	4.6	35.7	49.4	5	310 ³	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.0 QFN-16
GRF5317*	1.7-2.0	18	27.6	4.0	31.8	40.6	5	150 ³	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.0 QFN-16
GRF5617*	1.7-1.9	24.5	28.0	3.1	34.5	46.8	5	390 ³	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.0 QFN-16
GRF5618*	1.8-1.92	25.5	24.5	4.2	35.9	47.7	5	380 ³	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.0 QFN-16
GRF5619*	1.8-1.92	25.5	30.1	4.2	34.8	47	5	380 ³	3.0 QFN-16
GRF5521	2.11-2.17	23	31	3.1	33	45	5	235 ²	3.0 QFN-16
GRF5621*	2.11-2.17	25	31.5	3.1	35	47	5	380 ³	3.0 QFN-16
GRF5526*	2.5-2.7	23	30	3.3	32.2	45	5	250 ²	3.0 QFN-16
GRF5536*	3.3-4.2	23	27.3	4.1	32	45	5	280 ²	3.0 QFN-16
GRF5406**	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 ²	3.5 LFM
GRF5407**	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 ²	3.5 LFM
GRF5408**	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 ²	3.5 LFM
GRF5410**	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 ²	3.5 LFM
GRF5417**	1.7-1.8	22.5	27.5	5.4	32	48	5	305 ²	3.5 LFM
GRF5418**	1.8-1.91	23	27	4.2	32	45	5	310 ²	3.5 LFM
GRF5419**	1.92-2.0	23	26.5	4.1	32	45	5	310 ²	3.5 LFM
GRF5421**	2.11-2.17	23	31	3.1	33	45	5	250 ²	3.5 LFM

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P_{OUT} Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I_{DD} with RF power applied.

Note 3: Module with Internal Matching.

DSAs (Digital Step Attenuators)

Part Number	Frequency Range (GHz)	Atten Range (dB)	Step Size (dB)	Control Interface	Supported Addresses	IL (dB)	IIP3 (dBm)	V _{DD} Range (V)	Package (mm)
GRF6402*	0.05 - 6.0	31.75	0.25	SPI	8	1.4	> 57	3.0-5.5	3.0 QFN-16
GRF6403*	0.05 - 6.0	31.75	0.25	SPI + Parallel	1	1.4	> 57	3.0-5.5	4.0 QFN-24
GRF6404*	0.05 - 6.0	31.75	0.25	SPI + Parallel	8	1.4	> 57	3.0-5.5	5.0 QFN-32

* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

RF Power Detectors

Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V _{DD} Range (V)	I _{DD} (mA)	Package (mm)
GRF1201	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	1.5 DFN-6

NORTH AMERICA USA EAST

NEW YORK

L-MAR Associates
6800 Pittsford Palmyra Rd.,
Suite 125
Fairport, NY 14450
Phone: (585) 899-3920
Web: www.l-mar.com
Email: ep.lepkowski@l-mar.com

CONNECTICUT, MASSACHUSETTS, MAINE, NEW HAMPSHIRE, RHODE ISLAND, VERMONT

RF Associates, Inc.
430 Boston Rd.
Topsfield, MA 01983
Phone: (978) 887-9762
Web: www.rfassociates-ne.com
Email: sales@rfassociates-ne.com

METRO NY, LONG ISLAND, NEW JERSEY, PENNSYLVANIA, DELAWARE

RF Electronic Sales Company, Inc.
160 Irish Lane
Islip Terrace, NY 11752
Phone: (631) 277-0816
Web: rfsales.com
Email: info@rfsales.com

ALABAMA, GEORGIA, MISSISSIPPI, TENNESSEE, SOUTH CAROLINA, NORTH CAROLINA

E-Components
303 Williams Avenue SW, Suite 931
Huntsville, AL 35801
Phone: (256) 533-2444
Web: www.e-components.com
Email: jim.covey@e-components.com

MARYLAND, VIRGINIA, DISTRICT of COLUMBIA

VP Electronics
739 Weller Dr.
Mount Airy, MD 21771
Phone: (410) 961-3663
Web: vpelectronics.com
Email: Vincent.Pirro@vpelectronics.com

USA SOUTH - MIDWEST

INDIANA, IOWA, MINNESOTA, WISCONSIN, KANSAS, MISSOURI, NEBRASKA, N. DAKOTA, S. DAKOTA

Oak Technical Sales, LLC
1043 Grand Ave., Suite 179
Saint Paul, MN 55105
Phone: (612) 840-1651
Email: jsnow@oaktechsales.com

MICHIGAN

Enco Marketing
20246 Farmington Road
Livonia, MI 48152
Phone: (248) 536-0100
Web: encomarketing.com
Email: del.kauffman@encomarketing.com

ILLINOIS

Theta-J Associates
P.O. Box 5670
Vernon Hills, IL 60061
Phone: (847) 549-8820
Web: theta-j.com
Email: sales@theta-j.com

USA WEST

SOUTHERN CALIFORNIA, SOUTHERN NEVADA, HAWAII

ACETEC Inc.
6540 Lusk Blvd., Suite C-146
San Diego, CA 92121
Phone: (858) 784-0900
Web: acetec.com
Email: sales@acetec.com

NORTHERN CALIFORNIA, NORTHERN NEVADA, OREGON, WASHINGTON

Tritek Solutions, Inc. /Cain-White
4340 Stevens Creek Blvd, Suite 160
San Jose, CA 95129
Phone: (408) 492-0400
Web: tritekolutions.com
Email: tyhoeke@tritekolutions.com

ARIZONA, NEW MEXICO

Arcadia Technical Sales
303 4939 W Ray Road
Chandler, AZ 85226
Phone: (480) 940-6488
Web: arcadiatech.com
Email: sales@arcadiatech.com

AMERICAS

Guerrilla RF
Scott Montgomery
Phone: (214) 213-7396
Email: smontgomery@guerrilla-rf.com

CANADA

OTTAWA, MONTREAL and WESTERN CANADA

Repwave, Inc.
9 Shaughnessy Crescent
Ottawa, ON K2K 2P1
Canada
Phone: (613) 797-5385
Web: repwave.ca
Email: fmasciotra@repwave.ca

TORONTO, SOUTHWESTERN ONTARIO and WESTERN CANADA

Repwave, Inc.
254 Caves Court
Milton, ON L9T 5J2
Canada
Phone: (647) 883-7360
Web: repwave.ca
Email: claughren@repwave.ca

EUROPE

Wisteria Solutions
10 Rue de Penthièvre
75008 Paris
France
Philippe Roux
Phone: +33647620742
Web: wisteria-solutions.com
Email: contact@wisteria-solutions.com

MIDDLE EAST

ISRAEL

STG International Ltd
Derech Hashalom 53
Givatayim 53454
Israel
Phone: +972 (0) 03-7331456
Web: stgroup.co.il

ASIA

CHINA, HONG KONG

ApexTek Co., Limited
Room B3, 19/F, Tung Lee Commercial
Building, 91-97 Jervois Street,
Sheung Wan, Hong Kong
Phone: +86 13817040847
Email: info@apexteko.com

Guerrilla RF
Juby Zhou
Phone: +86 86 8897 6099
Email: bzhou@guerrilla-rf.com

JAPAN

Guerrilla RF
Kazu Shibata
Phone: +81 80 5180 5632
Email: mshibata@guerrilla-rf.com

Guerrilla RF
Michael Line
Phone: +81 80 5093 5507
Email: mline@guerrilla-rf.com

TAIWAN, SINGAPORE, SOUTHEAST ASIA

Guerrilla RF
Joshua Lin
Phone: +886 936 613 693
Email: hllin@guerrilla-rf.com

KOREA

Guerrilla RF
Michael Line
Phone: +81 80 5093 5507
Email: mline@guerrilla-rf.com

Telcom International Inc.
76, Seocho-daero, Seocho-Gu
Seoul, Korea
Phone: +82-2-582-9448
Web: telcom.kr
Email: jwchoi@telcom.kr

©2022 Guerrilla RF, Inc. All rights reserved. This document, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions in this document or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this document for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF. All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information,

documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their

use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.

Access the digital version of this guide
by scanning below:



guerrilla-rf.com/psg

Corporate Address:
1196 Pleasant Ridge Road
Greensboro, NC 27409

Phone: [336] 510-7840

